

EIKON



Short **catalogue** English



EIKON

EIKON TACTIL

EIKON EVO

EIKON CHROME

EIKON TOTAL LOOK

EIKON TACTIL



THE FUTURE TAKES SHAPE.

A technological jewel as pure as a diamond and as light as a feather.

TOUCH FUNCTION.

The lightest touch, and energy is under control.

PROXIMITY SENSOR.

The electronic controls sense when you are near the device and switch it on, ready for use.

PURE CRYSTAL.

A precious material, in 4 colours: white diamond, black diamond, pearl grey and aqua.

LUMINOSI

BEVELLED CRYSTAL



Black diamond



White diamond

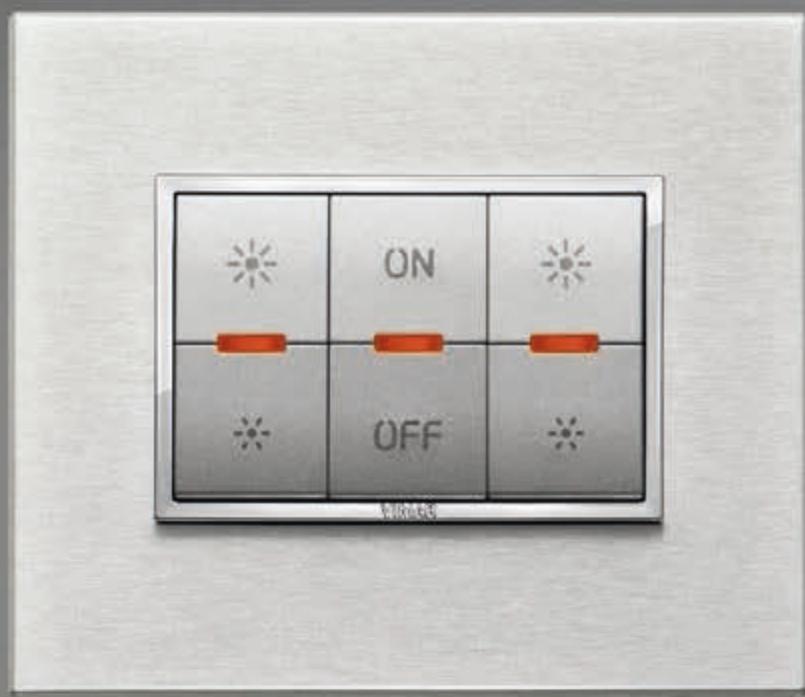


Aqua



Pearl grey

EIKON EVO



LUXURY UNVEILED.

With a style and a technology that add unique, irresistible value to all your everyday gestures.

ULTRA-SLIM PROFILE.

A lightweight, slim silhouette that stands out just a few millimetres from the wall, with axial buttons.

ELEGANT GEOMETRIES.

Shapes that are designed to catch the eye, rigorous and elegant, in sizes that are unobtrusive on the wall.

EXCLUSIVE MATERIALS.

Eight different precious materials, capturing the latest interior living trends.

PRIMARI

ANODIZED ALUMINIUM



Brilliant aluminium



Next grey



Neutral bronze



Dark bronze



Lava grey

ESCLUSIVI

REFINED ALUMINIUM



Silver



Titanium



Polished gold



Satin gold



Black sapphire

RAFFINATI

NATURAL LEATHER



Cream



Tobacco

SPECIALI

CORIAN®



Glacier ice

SCOLPITI

CARVED STONE



Carrara white



Grey quartzite



Natural split slate

NATURALI

SOLID WOOD



White oak



Italian walnut



Wengé

ESSENZIALI

TOTAL ALUMINIUM AND CRYSTAL



Total white



Total black



Total white diamond



Total black diamond

LUMINOSI

BEVELLED CRYSTAL



Silver ice



Bronze mirror



White diamond




Aqua



Pearl grey



Opal brown



Black diamond

EIKON CHROME



DAZZLING DETAILS.

A new definition of style where detail is supreme.

CHROME FRAME.

Shiny and smooth, a distinctive feature surrounding buttons and controls.

LINEAR OR ROUNDED?

Eikon Chrome responds to all needs with its Classic and Round designs.

MATERIALS AND COLOURS.

Prestige also comes in the five selected materials and the many colour variants.

BRIGHT

VARNISHED METAL - CLASSIC



Arctic white



Antique white



Metallic champagne



Metallic titanium



Metallic silver



Metallic Siena



Metallic anthracite



Matt silver



Matt titanium



Matt anthracite

VARNISHED METAL - ROUND



Arctic white



Antique white



Metallic champagne



Metallic titanium



Metallic atlantic grey



Metallic silver



Metallic anthracite



Matt silver



Matt titanium



Matt anthracite

REFINED

REFINED METAL - CLASSIC



Satin gold



Satin nickel



Polished gold

REFINED METAL - ROUND



Satin gold



Satin nickel



Polished gold



Satin chrome

WOOD

SOLID WOOD - CLASSIC



African wengé



White oak



Italian walnut

SOLID WOOD - ROUND



American cherrywood



White oak



Italian walnut

INOX

STAINLESS STEEL - CLASSIC



Brushed inox

STAINLESS STEEL - ROUND



Brushed inox

GLASS

CRYSTAL - CLASSIC



Black ice



White ice



Silver mirror

EIKON TOTAL LOOK



HARMONY IN COORDINATING COLOURS.

Three essential colours for cover plates, frames, buttons and controls.

THREE COLOURS.

White, anthracite grey and Next silver: buttons and devices are fully colour-coordinated with the cover plates and frames.

TWO SHAPES.

Rigorous profiles or sinuous lines? Each design has its own style.

UNIQUE MATERIAL.

Metal, a precious functional and design choice.

BRIGHT

VARNISHED METAL - CLASSIC



Matt anthracite



Arctic white



Matt silver

VARNISHED METAL - ROUND



Matt anthracite



Arctic white



Matt silver

Controls



Eikon Tactil

Electronic controls with proximity sensor

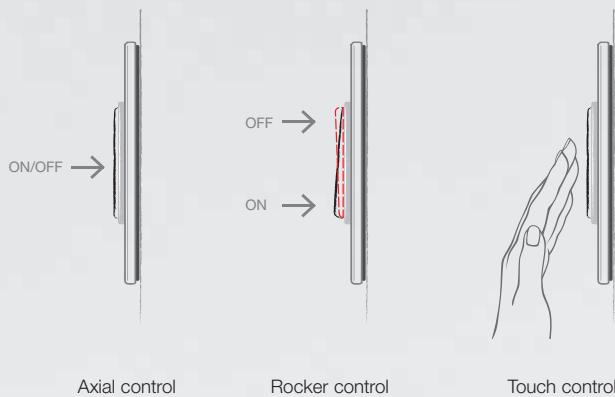
Eikon Tactil is intelligence, it reads your mind: the proximity sensor brings home automation devices to life as soon as you come near the device, one step ahead of your movements. The controls light up, ready for your touch.



With the patented Vimar technology, these controls recognise your touch in any condition, even when wearing gloves.

Axial, rocker and touch controls

Three different coloured buttons, modularity and freedom to customise: Eikon responds to any installation and beauty demand. Lots of different commands: axial, rocker, infrared, all with the technological precision guaranteed by Vimar.



Axial control

Rocker control

Touch control

Button colours

Available in anthracite grey, white or Next. Eikon dresses in the colours that best suit contemporary interiors, offering great design freedom.



Customization

Buttons with laser engraved or customised with Mylar labels with symbols chosen from our customisation library, or requested by the customer. To clearly indicate the function associated to the control.

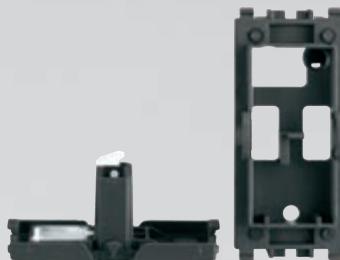


Controls

Soft action: precision and silence

With soft action technology, the rocker and axial controls move silently and precisely, with minimum protrusion from the wall. A soft, muted sound accompanies the silky feel of the buttons - with one, two or three fully interchangeable modules - ensuring the best in comfort.

The spring geometry of the moving contact of the mechanism performs a natural cushioning function, reducing its electrical recoils and wear, also thanks to a large increase in the quantity of silver of the contacts.



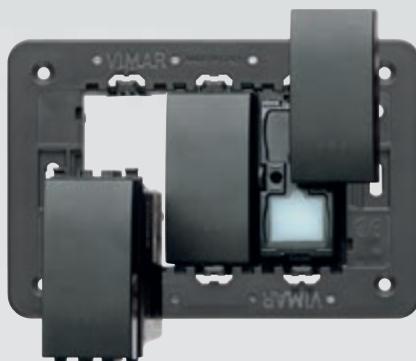
Movement of the button



Moving spring contact

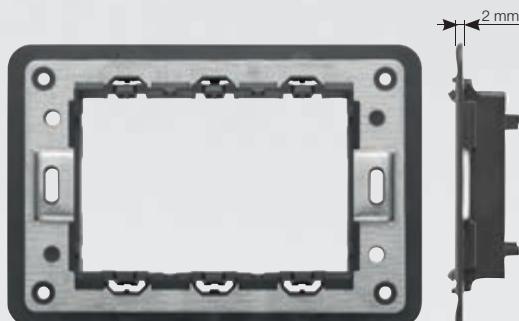
Plack-clack mounting

A Vimar patent that makes it quicker and easier to fit the lighting devices to the cover plate. A slot in system offering greater structural strength and exceptional rigidity, making the front fitting and removal of devices easier. This allows you to work on the system without having to remove the support.



Lowered support with steel core

Just 2 mm thick, this support is in any case strong, flexible and insulated, with a steel core and a galvanised, anti-oxidant coating. Cover plates protrude just a few millimetres from the wall without compromising on the rigidity and flexibility required to respond to a wide range of installation needs. Wrapped in a layer of top quality technopolymer, the new support ensures full electrical insulation and simple and immediate insert attachment.



Visibility

Buttons visible even in the dark, fitted with an efficient, low energy LED technology signalling unit underneath. For a warm light, available in a range of colours and coordinated with the electronic device displays.



Ergonomic contacts

The metal plate in the Eikon terminals is curved: a Vimar solution to hold the wire in place until the screw is tightened.



INTELLIGENT, INTUITIVE FUNCTIONS FOR MANAGING ENERGY.

SUPERVISION

The 10" multimedia Video Touch screen manages and controls everything that happens inside and outside the home, with high-definition images and coordinated, customised graphics. The web interface offers remote control via smartphone, PC and tablet.



10" multimedia video touch screen

COMMUNICATION

The 4,3" video touch screen offers complete control over all the video door entry and home automation functions.



4,3" video touch screens

ENERGY EFFICIENCY

The 4,3" Full Flat touch screen controls the entire home, providing precise information on the energy profile and consumption of the whole home or of each individual device.



4,3" Full Flat touch screen

ALL YOUR LIVING DESIRES ASSURED DOWN
TO THE FINEST DETAIL.

AESTHETIC COORDINATION

Technology that allows you to coordinate the appearance of every application perfectly: monitoring, controls and connection to any network. A coordinated, complete device, where design stands side by side with functional excellence.



3-module touch screen



Eikon Tactil controls



Outlets

COLOURS

Three different colours for buttons and controls, from light white to rigorous anthracite grey, passing through elegant Next silver. In the name of a technology that has never been separated from design.



Anthracite grey



White



Next

COMPLETE CONTROL

A wide range of control devices for all your installation needs. Soft-action axial controls, with wireless and battery-free radio-controlled technology, electronic infrared or touch versions with home automation intelligence. The whole home responds to your commands, all functions can be coordinated in a scenario and be controlled remotely from a latest generation PC, smartphone or tablet.



Axial controls



Eikon Tactil home automation control



Home automation controls

EFFICIENT COMFORT

Touch devices to manage widespread well-being, like music playing in all the rooms, universal dimmers to set the lighting and play with coloured lights, timer-thermostats ensuring just the right temperature at any time of the day, room by room, and modular lighting to see clearly in any situation. Efficient technology that guarantees maximum comfort.



3-module touch screen for temperature control



Universal light dimmers



Touch timer-thermostat

OPTIMISED ENERGY

Don't waste energy. Ever! Thermostats that adjust the temperature to actual everyday needs; devices that control electrical loads, monitor consumption and show produced energy; programmable timer-switches that switch the devices on at the right time. Rational management of all your home energy, because Eikon also means energy awareness.



Programmable timer-switch



Load control



3-module touch screen for load management

RELIABLE SECURITY

Excellent technology, silently protecting people and their homes, at all times. And if there's an alarm, you'll receive a text or an e-mail, wherever you are. Different kinds of burglar alarms; surveillance cameras for every room, gas detectors to report and block any leaks and interlocked sockets protecting against accidental contacts.



Digital keypad



Video camera with microphone



Methane gas detector

SURPRISING MULTIMEDIA MANAGEMENT

Connection to the outside world, or pure enjoyment: technology also means this. Eikon offers extraordinary multimedia performance with its high quality sound system, the wide range of data, audio, video and USB sockets and its compatibility with iPods, iPhones and MP3 players.



Sound system touch screen



USB, HDMI, RCA sockets



Docking station

INTERNATIONAL VOCATION

Wherever you are in the world, Eikon supplies sockets with different standards, modular controls and cover plates to help you design, organise and manage energy in compliance with the systems used in over 100 countries around the world.



Installation versatility



Different modules

BY-ME. HOME AUTOMATION ENSURING CONTROL, COMFORT, ENERGY EFFICIENCY AND SAFETY. THROUGHOUT THE HOME.



GLOBAL MONITORING

Easy-to-surf technology used to control the different parts of the home, setting scenarios, adjusting the temperature, managing lighting and automated devices in each one.



BURGLAR ALARM MONITORING

It can manage the whole burglar alarm system, or any of the single parts it can be divided into.



SOUND SYSTEM

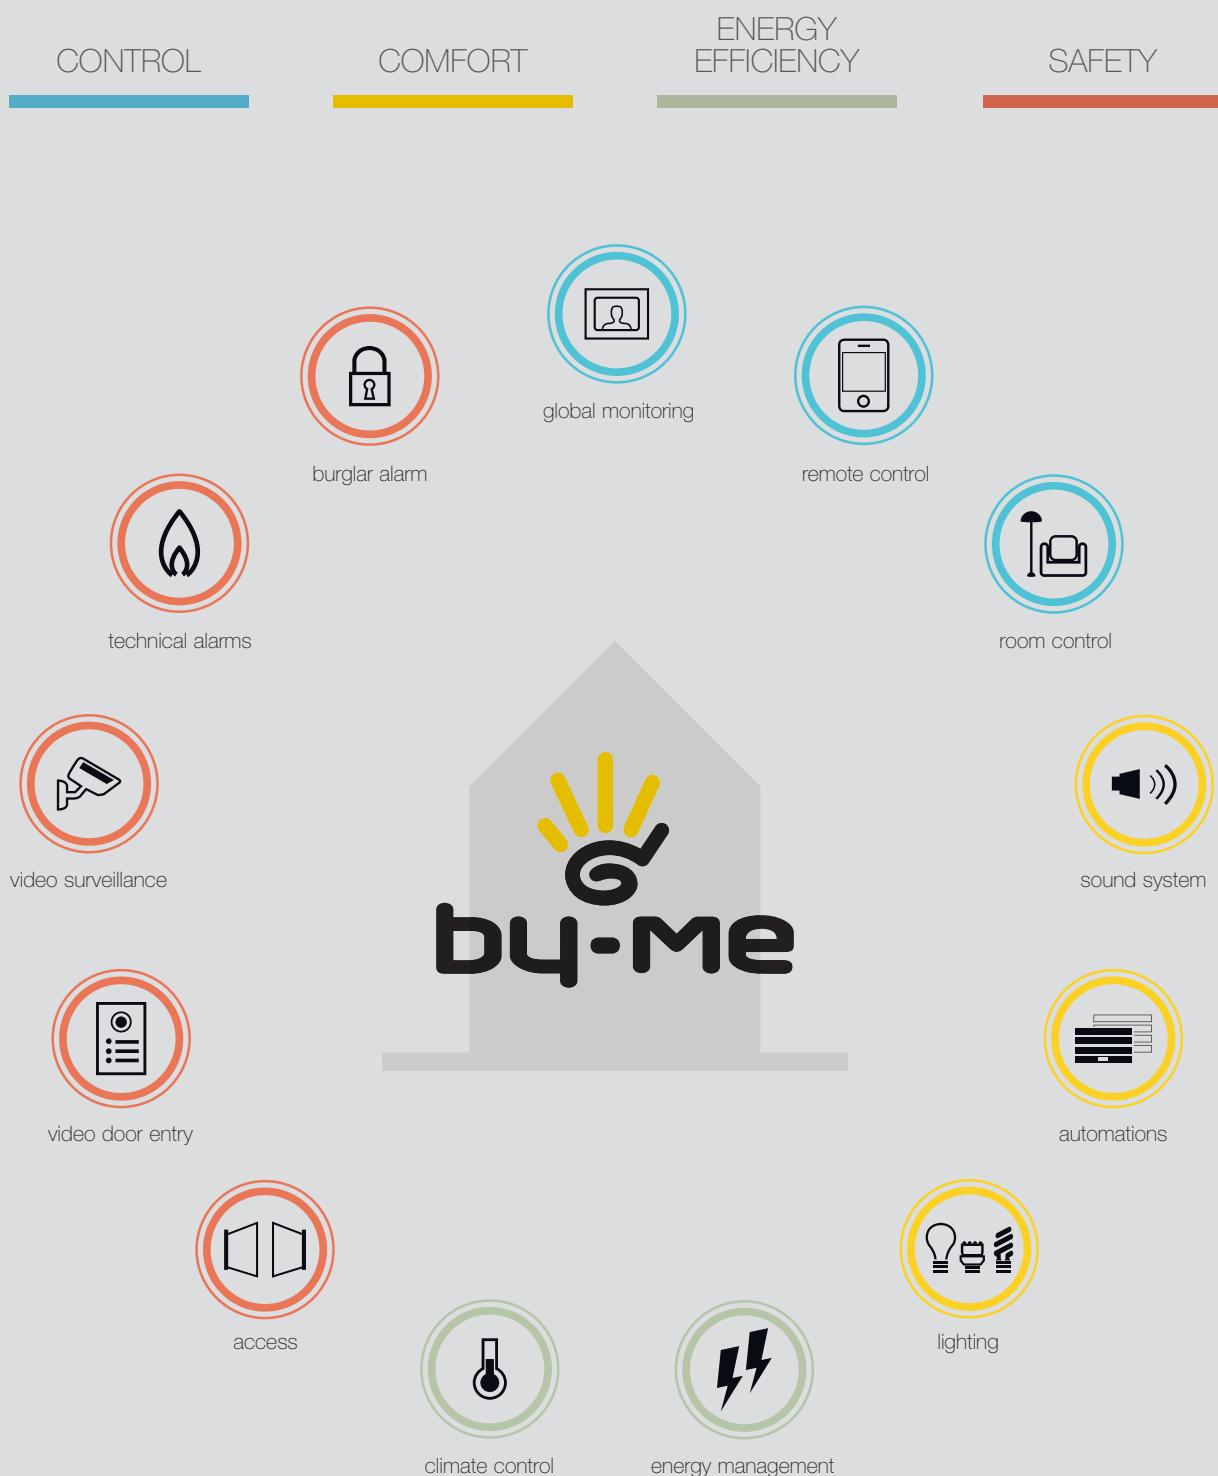
Play and control music from an MP3 player, iPod or smartphone in any room.



ENERGY OPTIMISATION

Offers an overview of the whole system, allowing you to monitor the consumption of every device.

Eikon interacts with the By-me system, dialoguing continuously with the home to ensure constant monitoring and well-being, in line with individual needs. Coordinated functions that are easy to use with a high technological content, making everyday actions easier and simpler.



WELL-CONTACT PLUS. AUTOMATIONS, ENTRY, HVAC AND LIGHTING, UNDER CONTROL IN EVERY BUILDING.



GLOBAL MONITORING

Automation, entry, HVAC and energy saving are managed by a single system developed to the KNX standard.



ROOM CONTROL

Clients have immediate, intuitive supervision of each room, enabling their favourite comfort scenarios.



CLIMATE CONTROL

Intelligent, customised temperature management in every room.



ACCESS




Different devices for managing entry to every office or hotel room, guaranteeing maximum security.

Eikon solutions can be perfectly applied to hotels, offices, management centres, shopping centres and gyms. Managed in a simple, intelligent and coordinated manner with the Well-contact Plus system. This hardware, developed to standard KNX technology, can be incorporated in other technological systems in the building, for controlling lights, temperature, energy, entries and automations. For fully integrated design and technology.

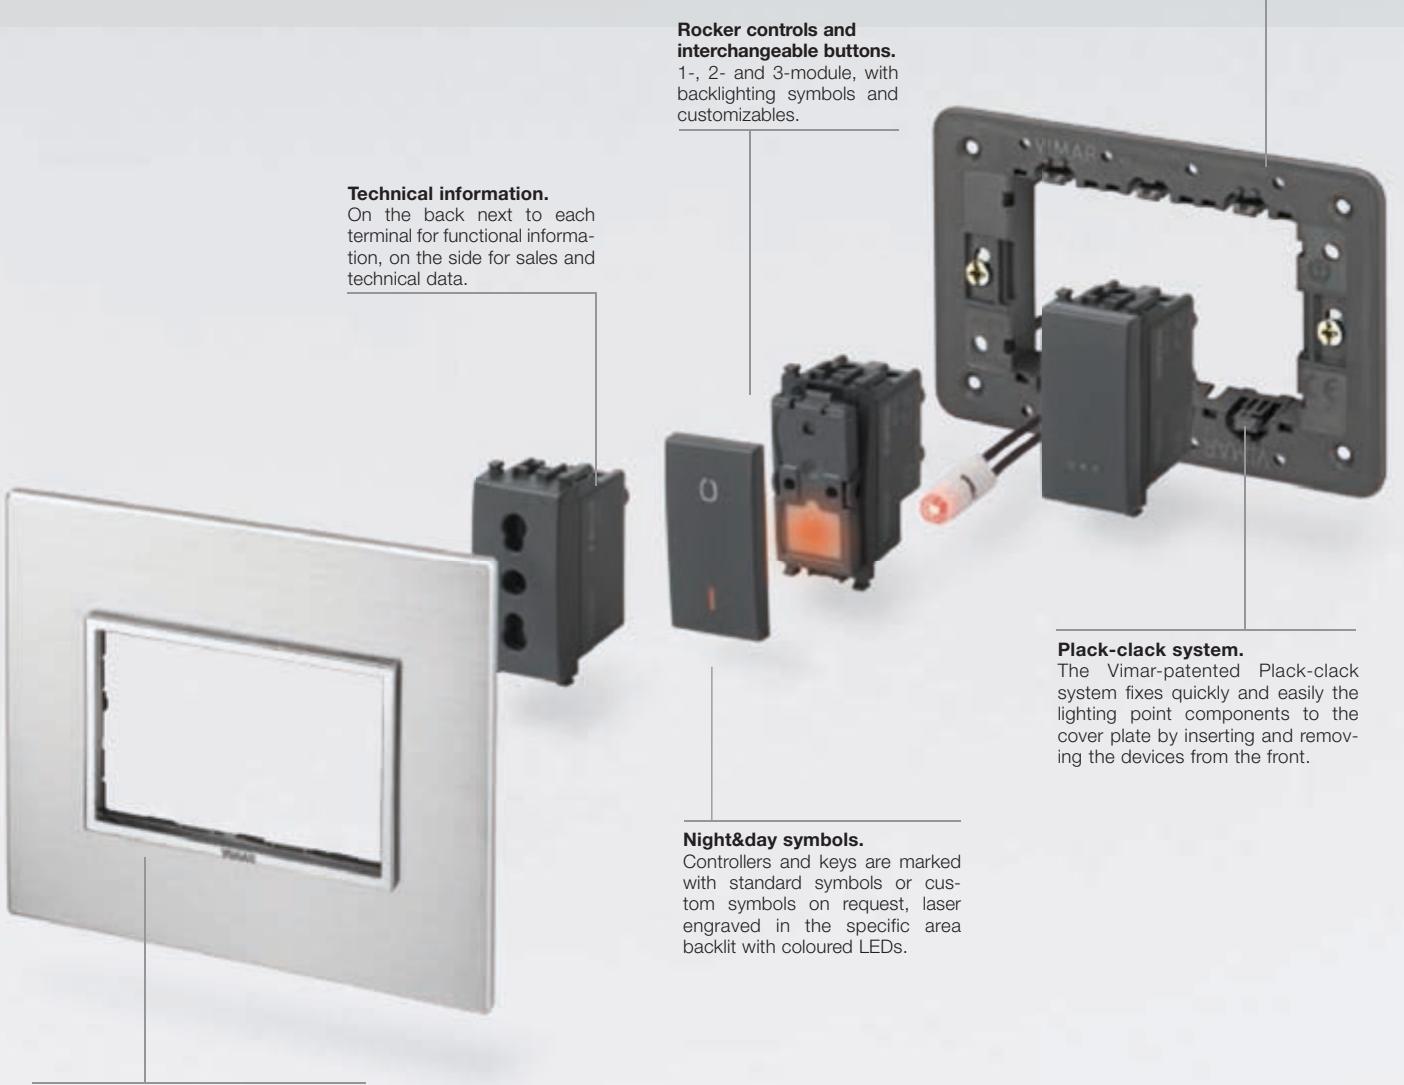


Mounting features for Eikon Tactil



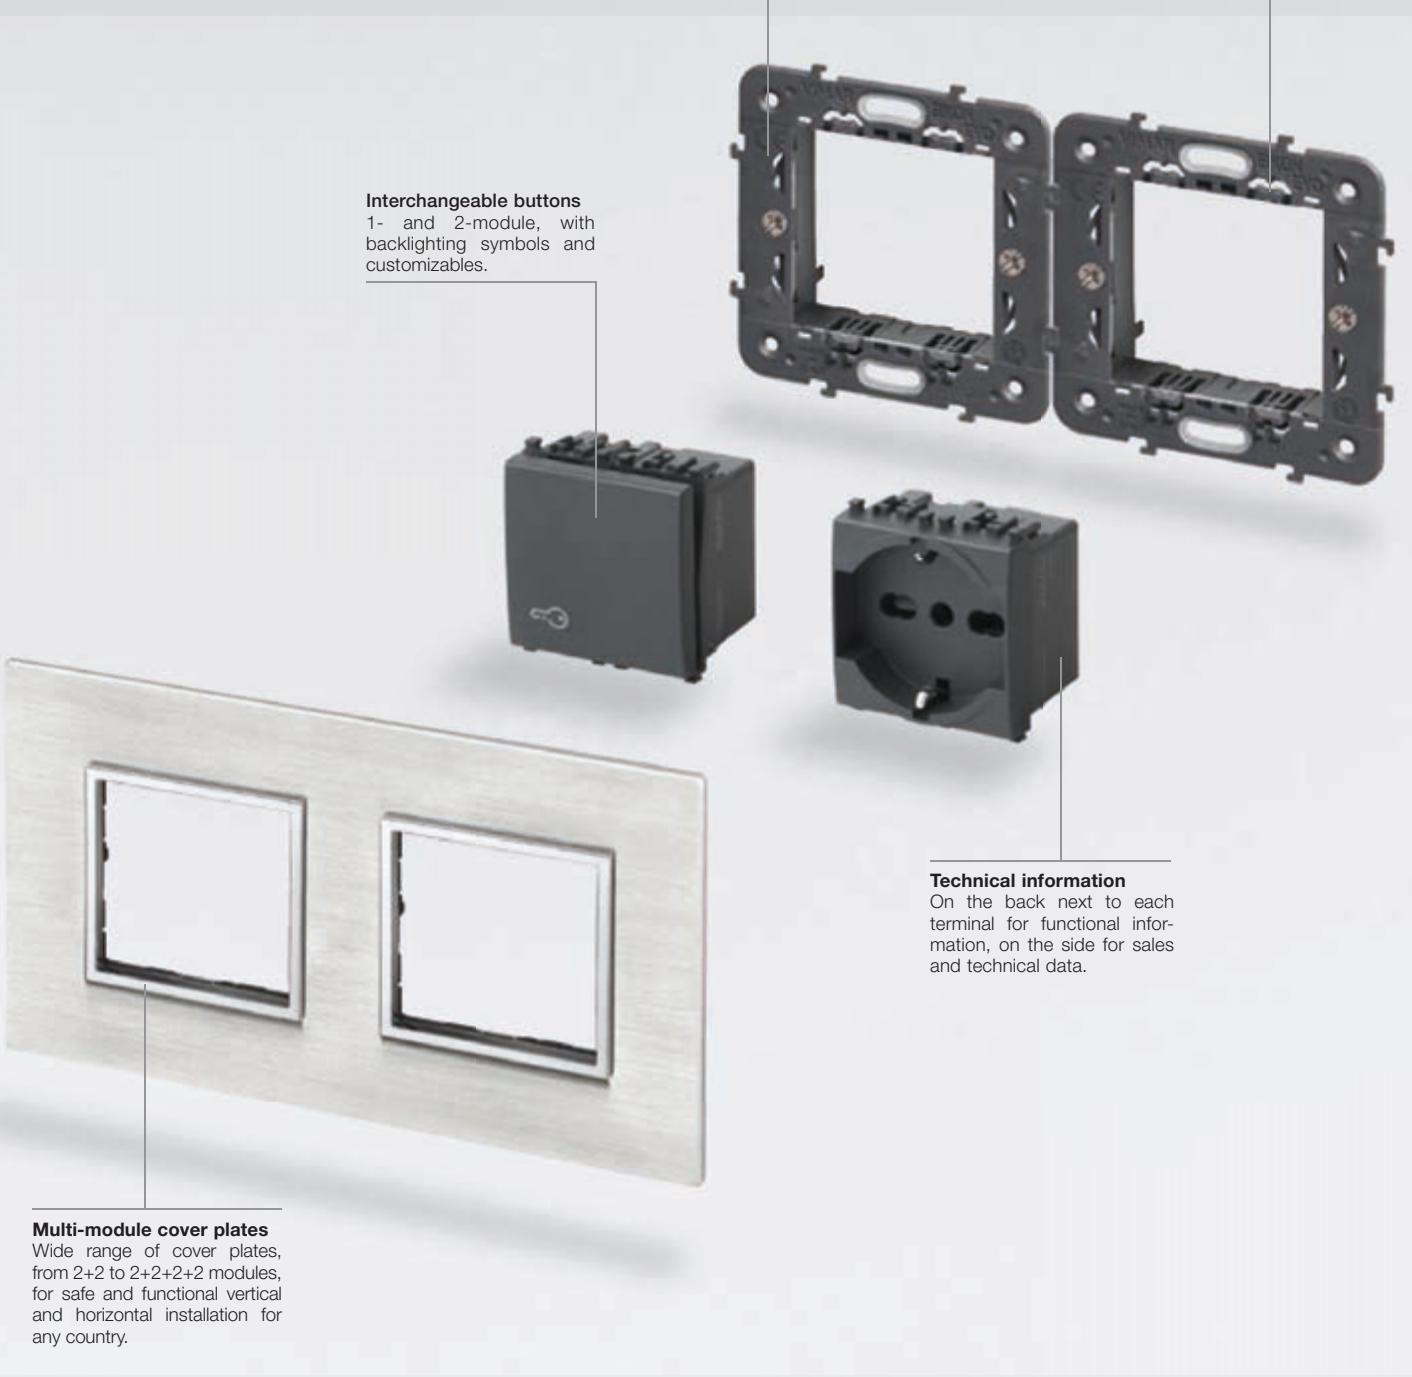
Composition	Box	Frame	Device	Cover plate
			 	
			  	
			  	

Mounting features for Eikon Evo Italian standard



Composition	Box	Frame	Device	Cover plate
 2 modules	 Flush mounting ø 60 mm or 56x56 mm	 With/without screws	 2 x 1-module  1 x 2-module	 2 modules
 From 3 to 7 modules	 Flush mounting from 3 to 7 modules	 With screws	 3 x 1-module  1- and 2-module  1 x 3-module	 From 3 to 7 modules*
 10" multimedia video touch	 Semi-flush mounting			 Cover plate for multimedia video touch 10"
 4,3" Full Flat touch screen	 Flush mounting	 With screws	 4,3" Full Flat touch screen  2 x 1-module and 1 x 2-module  4 x 1-module	 8 modules cover plate*
 4,3" Full Flat video touch			 4,3"Full Flat video touch	 8 modules cover plate*, rotated at 90° angle

Mounting features for Eikon Evo German standard - 71 mm

**Ultra-flat mounting frame with metal core.**

Just 2 mm thick, it guarantees strength, flexibility and electric insulation. The metal core has a galvanised, anti-oxidant coating and attaches devices quickly and easily. Wide range of installation possibilities because of the 71 mm between centres.

Plack-clack system.












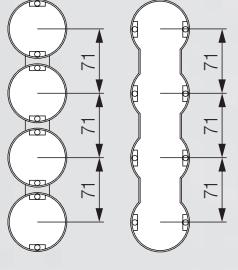
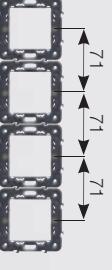



The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.

Interchangeable buttons
1- and 2-module, with
backlighting symbols and
customizable.**Multi-module cover plates**

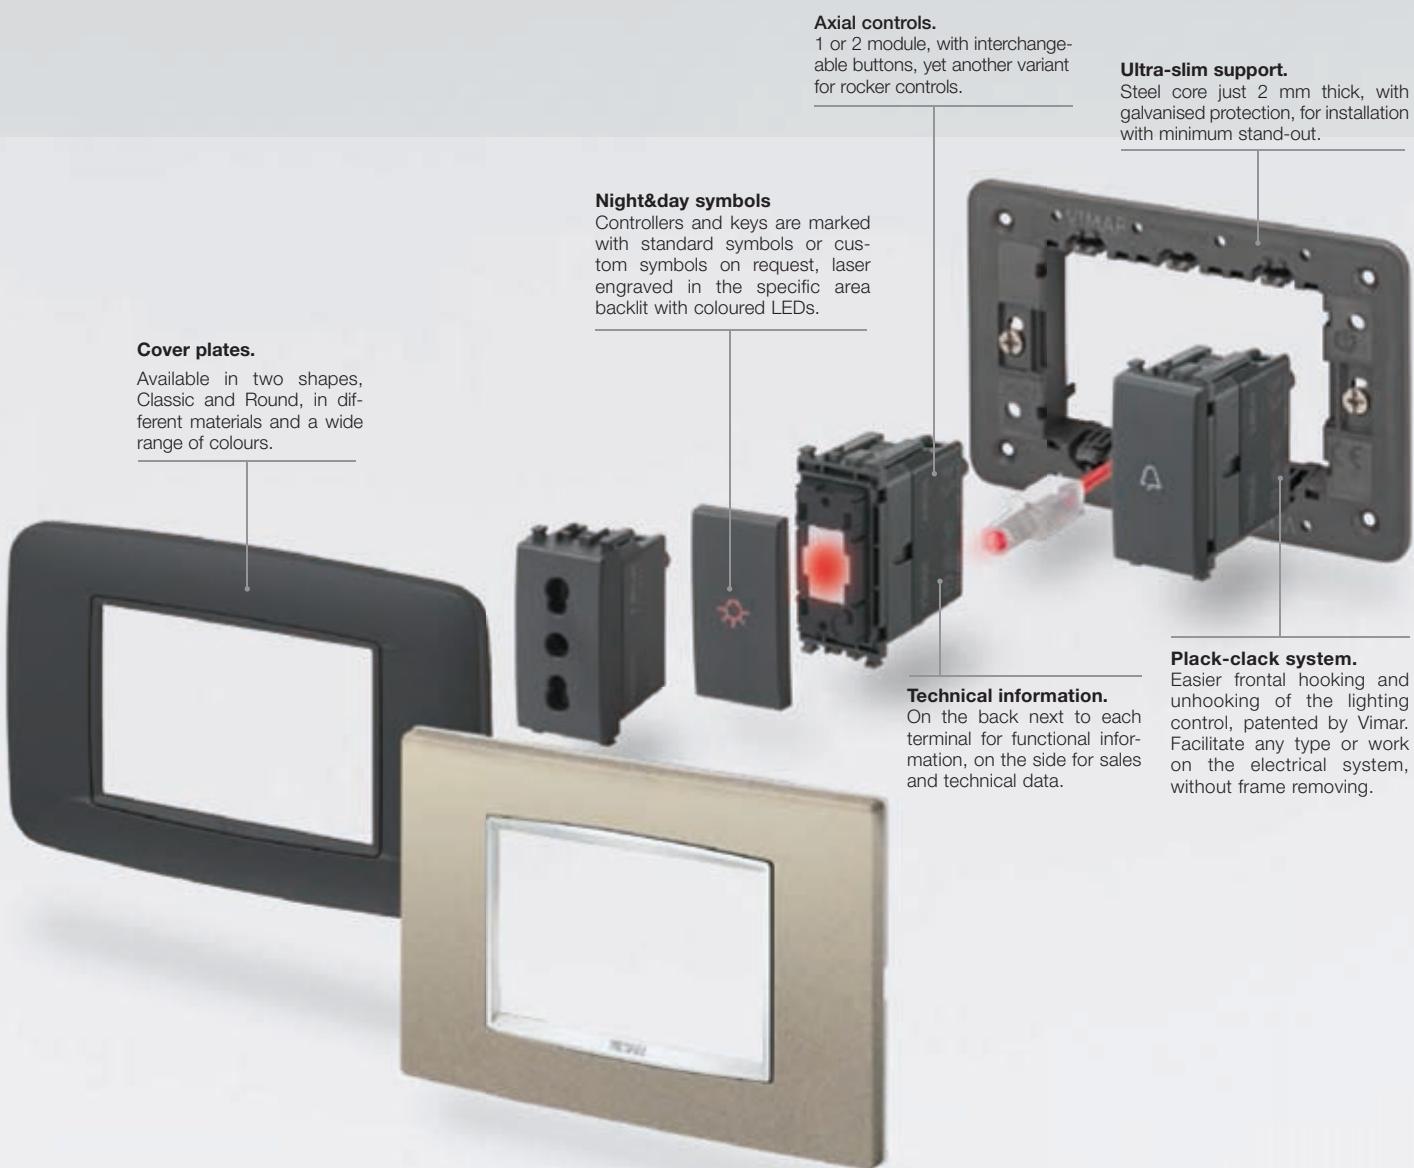
Wide range of cover plates, from 2+2 to 2+2+2 modules, for safe and functional vertical and horizontal installation for any country.

Technical information

On the back next to each terminal for functional information, on the side for sales and technical data.

Composition	Box	Frame	Device	Cover plate
2+2 modules			With/without screws with 71 mm between centres	2 x 2 modules
			With/without screws with 71 mm between centres	2 x 2 modules
				2+2 modules, horizontal installation
2+2+2 modules			With/without screws with 71 mm between centres	3 x 2 modules
			With/without screws with 71 mm between centres	2+2+2 modules, vertical installation
				2+2+2 modules, horizontal installation
2+2+2+2 modules			With/without screws with 71 mm between centres	4 x 2 modules
			With/without screws with 71 mm between centres	2+2+2+2 modules, vertical installation
				2+2+2+2 modules, horizontal installation

Mounting features for Eikon Chrome and Eikon Total Look

**Cover plates.**

Available in two shapes, Classic and Round, in different materials and a wide range of colours.




Axial controls.

1 or 2 module, with interchangeable buttons, yet another variant for rocker controls.

Ultra-slim support.

Steel core just 2 mm thick, with galvanised protection, for installation with minimum stand-out.



Composition	Box	Frame	Device	Cover plate		
 Panel mounting	 Panel mounting	 With screws	 1-module	 From 1 to 2 modules Classic or Round* (only for Eikon Total Look)		
 From 1 to 2 modules	 Flush mounting	 Surface mounting	 2-module with/without screws or with claws	 2 x 1-module	 1 x 2-module	 From 1 to 2 modules Classic or Round*
 For 2 central modules	 Flush mounting	 With screws	 2 x 1-module	 2-module	 2-central-module Classic or Round*	
 From 3 to 7 modules	 Surface mounting	 With screws	 1 and 2-module	 3 x 1-module	 1 x 3-module	 From 3 to 7 modules Classic or Round*
 8 modules	 Flush mounting	 With screws	 Touch screen 4,3" "Energy"	 2 x 1-module and 1 x 2-module	 4 x 1-module	 8 modules Classic or Round*
 Table mounting	 Table box	 With screws	 1 and 3-module	 4 and 7 modules Classic or Round*		

Mounting features for Eikon British standard

Modular devices mounting



Technical information
On the back next to each terminal for functional information, on the side for sales and technical data.

Interchangeable buttons
One or two modules, with backlit symbols and customizable.



Customisation
Controllers and keys are marked with standard symbols or custom symbols on request, laser engraved in the specific area backlit with coloured LEDs.



Lowered frame.
Stainless steel mounting frame with earth terminal, with lugs for an easy and fast installation of the devices from the front.
Available also for 1 module with built-in blank module.

Cover plates

Wide range of colours and combinations:
EIKON EVO
EIKON CHROME
EIKON TOTAL LOOK

Monobloc device (with built-in mounting frame)



Socket outlet
With SICURY patented system to prevent accidental contacts.



Monobloc device
Built-in mounting frame.

Fixing lugs
Possibility of horizontal and vertical mounting of device.




Signalling LED
Signalling of power supply, with integrated signalling unit, perfectly visible by day and night.

Cover plates
For vertical and horizontal mounting

Matching possibility



Joining possibility with minimum 25 mm of distance between boxes

Composition	Box	Frame	Device	Cover plate
	 1-gang mounting box Fixing centres: 60,3 mm		1-gang switch, 1 module	 From 1 to 2 modules*
	 1-gang mounting box Fixing centres: 60,3 mm		3-gang switch, 2 modules 2 x 1-gang switches, 1 module 1-gang switch, 2 modules	 From 1 to 2 modules*
	 1-gang mounting box Fixing centres: 60,3 mm		Socket outlet monobloc device ON/OFF unit monobloc device	 monobloc horizontal mounting*  monobloc vertical mounting*
	 2-gang mounting box Fixing centres: 120,6 mm		2-gang switched socket outlets monobloc device 2 x 2-module + 1 x 1-module	 5 modules*

EIKON TACTIL

Blank modules

**21041**Blank module.
Depth: 11 mm


Electronic devices

**21119**NO 6 A 230 V~ relay
output, supply voltage
230 V~ 50/60 Hz.
Depth: 42,5 mm**21174**For cos ϕ 0,6 2 A 230 V~
roller shutters laths
adjustment.
Depth: 42,5 mm**21122**Electronic remote control, 2 push
buttons for the remote control of
a single or centralized control.
Depth: 42,5 mm


230 V~ 50 Hz dimmers

**21134**MASTER, 40-500 W, 40-300 VA,
CFL 10-200 W, LED 3-200 W.
Depth: 42,5 mm

By-me - Electronic devices

**21520**4 programmable buttons for
2 single controls or scenes
- 2 modules.
Depth: 38 mm**21540**6 programmable buttons for
3 single controls or scenes
- 3 modules.
Depth: 38 mm


Well-contact Plus - Electronic devices

**21840**4 independently programmable
buttons for single controls or
scenes, KNX standard
- 2 modules. Depth: 38 mm**21860**6 independently programmable
buttons for single controls or
scenes, KNX standard
- 3 modules. Depth: 38 mm

Labels

**21847**8 sheets of stickers with
symbols and words for
Eikon Tactil devices

Well-contact Plus - Access control system

**21457**Eikon Tactil touch transponder card reader,
KNX standard, 2 relay outputs NO 4 A 24 V~,
2 inputs, 12-24V~ 50/60 Hz and 12-24 Vdc (SELV)
- 3 modules. Supplied without transponder card.
Depth: 36,5 mm**21666.70**Electronic plate for 21457,
white diamond - 3 modules**21666.71**Electronic plate for 21457,
aqua - 3 modules**21666.73**Electronic plate for 21457,
pearl grey - 3 modules**21666.76**Electronic plate for 21457,
black diamond - 3 modules

Devices

Grey

White

Next

Blank modules and cable outlets



20041
Blank module.
Depth: 11 mm



20044
Cable outlet.
Depth: 16,6 mm



20041.B
Blank module.
Depth: 11 mm



20044.B
Cable outlet.
Depth: 16,6 mm



20041.N
Blank module.
Depth: 11 mm



20044.N
Cable outlet.
Depth: 16,6 mm



20042
Blank module - 2 modules.
Depth: 11 mm



20042.B
Blank module - 2 modules.
Depth: 11 mm



20042.N
Blank module - 2 modules.
Depth: 11 mm



20046²
Cable outlet +
terminalbar 20 A.
Depth: 22,1 mm



20047²
45 A 1-gang cable outlet
supplied with cover plate.
Depth: 20 mm



20046.B²
Cable outlet +
terminalbar 20 A.
Depth: 22,1 mm



20047.B²
45 A 1-gang cable outlet
supplied with cover plate.
Depth: 20 mm



20046.N²
Cable outlet +
terminalbar 20 A.
Depth: 22,1 mm



20047.N²
45 A 1-gang cable outlet
supplied with cover plate.
Depth: 20 mm



20049.L³
13 A, 1-gang, switched and fused
connection unit. Depth: 20,4 mm



20049.L.B³
13 A, 1-gang, switched and fused
connection unit. Depth: 20,4 mm



20049.N³
13 A, 1-gang, switched and fused
connection unit. Depth: 20,4 mm

1P 1-way switches 250 V~ (lightable^o)



20001
16 AX.
Depth:
25 mm



20001.2
16 AX
- 2 modules.
Depth: 25 mm



20001.B
16 AX.
Depth:
25 mm



20001.N
16 AX.
Depth:
25 mm



20002
20 AX.
Depth:
25 mm



20002.2
20 AX
- 2 modules.
Depth: 25 mm



20003
20 AX, 3-gang
- 2 modules.
Depth: 25 mm



20002.B
20 AX.
Depth:
25 mm



20002.N
20 AX.
Depth:
25 mm



20003.N
20 AX, 3-gang
- 2 modules.
Depth: 25 mm

Axial 1P 1-way switches 250 V~ (lightable^o)



20101
16 AX.
Depth:
34,5 mm



20101.2
16 AX
- 2 modules.
Depth: 34,5 mm



20101.B
16 AX.
Depth:
34,5 mm




20101.N
16 AX.
Depth:
34,5 mm

Grey

White

Next

2P 1-way switches 250 V~ (lightable°)



20015
16 AX.
Depth:
25 mm




20015.2
16 AX
- 2 modules.
Depth: 25 mm




20015.B
16 AX.
Depth:
25 mm



20015.2.B
16 AX
- 2 modules.
Depth: 25 mm



20015.N
16 AX.
Depth:
25 mm



20015.2.N
16 AX
- 2 modules.
Depth: 25 mm



20016
20 AX.
Depth:
26 mm



20016.2
20 AX, ON/OFF
- 2 modules.
Depth: 26 mm



20016.WH
20 AX,
Water/Heater.
Depth: 26 mm



20016.B
20 AX.
Depth:
26 mm



20016.2.B
20 AX, ON/OFF
- 2 modules.
Depth: 26 mm



20016.N
20 AX.
Depth:
26 mm



20016.2.N
20 AX, ON/OFF
- 2 modules.
Depth: 26 mm



20016.WH.N
20 AX,
Water/Heater.
Depth: 26 mm



20016.2.WH
20 AX, Water/Heater
- 2 modules.
Depth: 26 mm



20016.2.WH.B
20 AX, Water/Heater
- 2 modules.
Depth: 26 mm



20016.2.WH.N
20 AX, Water/Heater
- 2 modules.
Depth: 26 mm



20017
32 A, 1-gang, ON/OFF.
Depth: 22,5 mm



20017.WH
32 A, 1-gang, Water/Heater.
Depth: 22,5 mm



20017.B
32 A, 1-gang, ON/OFF.
Depth: 22,5 mm



20017.WH.B
32 A, 1-gang, Water/Heater.
Depth: 22,5 mm



20017.N
32 A, 1-gang, ON/OFF.
Depth: 22,5 mm



20017.WH.N
32 A, 1-gang, Water/Heater.
Depth: 22,5 mm



20018
45 A, 1-gang, ON/OFF.
Depth: 22,5 mm



20018.CK
45 A, 1-gang, cooker unit.
Depth: 22,5 mm



20018.B
45 A, 1-gang, ON/OFF.
Depth: 22,5 mm



20018.CK.B
45 A, 1-gang, cooker unit.
Depth: 22,5 mm



20018.N
45 A, 1-gang, ON/OFF.
Depth: 22,5 mm



20018.CK.N
45 A, 1-gang, cooker unit.
Depth: 22,5 mm



20019
45 A, 1-gang, ON/OFF
for 2-gang boxes.
Depth: 22,5 mm



20019.CK
45 A, 1-gang, cooker
unit for 2-gang boxes.
Depth: 22,5 mm



20019.B
45 A, 1-gang, ON/OFF
for 2-gang boxes.
Depth: 22,5 mm



20019.CK.B
45 A, 1-gang, cooker
unit for 2-gang boxes.
Depth: 22,5 mm



20019.N
45 A, 1-gang, ON/OFF
for 2-gang boxes.
Depth: 22,5 mm



20019.CK.N
45 A, 1-gang, cooker
unit for 2-gang boxes.
Depth: 22,5 mm

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Devices

Grey

White

Next

Badge switch (lightable°)



20466
Badge switch.
Depth: 22,1 mm



20466.B
Badge switch.
Depth: 22,1 mm



20466.N
Badge switch.
Depth: 22,1 mm

1P 2-way switches 250 V~ (lightable°)



20005
16 AX.
Depth:
25 mm

20005.2
16 AX
- 2 modules.
Depth: 25 mm



20005.B
16 AX.
Depth:
25 mm

20005.2.B
16 AX
- 2 modules.
Depth: 25 mm



20005.N
16 AX.
Depth:
25 mm

20005.2.N
16 AX
- 2 modules.
Depth: 25 mm



20006
20 AX.
Depth:
25 mm

20006.2
20 AX,
- 2 modules.
Depth: 25 mm



20006.B
20 AX.
Depth:
25 mm

20006.2.B
20 AX,
- 2 modules.
Depth: 25 mm



20006.N
20 AX.
Depth:
25 mm

20006.2.N
20 AX,
- 2 modules.
Depth: 25 mm

1P 2-way switches 250 V~



20007
20 AX, 3-gang
- 2 modules.
Depth: 32,6 mm



20007.B
20 AX, 3-gang
- 2 modules.
Depth: 32,6 mm



20007.N
20 AX, 3-gang
- 2 modules.
Depth: 32,6 mm

Axial 1P 2-way switches 250 V~ (lightable°)



20105
16 AX.
Depth:
34,5 mm

20105.2
16 AX
- 2 modules.
Depth: 34,5 mm



20105.B
16 AX.
Depth:
34,5 mm


20105.2.B
16 AX
- 2 modules.
Depth: 34,5 mm



20105.N
16 AX.
Depth:
34,5 mm

20105.2.N
16 AX
- 2 modules.
Depth: 34,5 mm

1P reversing switches 250 V~ (lightable°)



20013
16 AX.
Depth:
25 mm

20013.2
16 AX
- 2 modules.
Depth: 25 mm



20013.B
16 AX.
Depth:
25 mm


20013.2.B
16 AX
- 2 modules.
Depth: 25 mm



20013.N
16 AX.
Depth:
25 mm

20013.2.N
16 AX
- 2 modules.
Depth: 25 mm

Devices






Grey	White	Next						
Axial 1P reversing switches 250 V~ (lightable°)								
 20113 16 AX. Depth: 34,5 mm	 20113.2 16 AX - 2 modules. Depth: 34,5 mm	 20113.B 16 AX. Depth: 34,5 mm	 20113.2.B 16 AX - 2 modules. Depth: 34,5 mm	 20113.N 16 AX. Depth: 34,5 mm	 20113.2.N 16 AX - 2 modules. Depth: 34,5 mm			
1P NO 10 A push buttons 250 V~ (lightable°)								
 20008 10 A. Depth: 25 mm	 20008.2 10 A - 2 modules. Depth: 25 mm	 20008.B 10 A. Depth: 25 mm	 20008.2.B 10 A - 2 modules. Depth: 25 mm	 20008.N 10 A. Depth: 25 mm	 20008.2.N 10 A - 2 modules. Depth: 25 mm			
 20008.2.C Bell symbol - 2 modules. Depth: 25 mm	 20008.2.L Light symbol - 2 modules. Depth: 25 mm	 20008.2.C.B Bell symbol - 2 modules. Depth: 25 mm	 20008.2.L.B Light symbol - 2 modules. Depth: 25 mm	 20008.2.C.N Bell symbol - 2 modules. Depth: 25 mm	 20008.2.L.N Light symbol - 2 modules. Depth: 25 mm			
Axial 1P NO 10 A push buttons 250 V~ (lightable°)								
 20108 10 A. Depth: 34,5 mm	 20108.2 10 A - 2 modules. Depth: 34,5 mm	 20108.B 10 A. Depth: 34,5 mm	 20108.2.B 10 A - 2 modules. Depth: 34,5 mm	 20108.N 10 A. Depth: 34,5 mm	 20108.2.N 10 A - 2 modules. Depth: 34,5 mm			
1P NC 10 A push button 250 V~ (lightable°)								
 20010 10 A. Depth: 25 mm	 20010.B 10 A. Depth: 25 mm	 20010.N 10 A. Depth: 25 mm						
Lightable° mechanisms 250 V~ (common devices for the three versions)								
 20001.0 1P 16 AX 1-way switch. Depth: 25 mm	 20015.0 2P 16 AX 1-way switch. Depth: 25 mm	 20005.0 1P 16 AX 2-way switch. Depth: 25 mm	 20013.0 1P 16 AX reversing switch. Depth: 25 mm	 20008.0 1P NO 10 A push button. Depth: 25 mm	 20010.0 1P NC 10 A push button. Depth: 25 mm	 20002.0 1P 20 AX 1-way switch. Depth: 25 mm	 20016.0 2P 20 AX 1-way switch. Depth: 25 mm	 20006.0 1P 20 AX 2-way switch. Depth: 25 mm

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Devices

Grey	White	Next
1-module interchangeable buttons (lightable°)		
 20021 No symbol	 20021.B No symbol	 20021.N No symbol
 20026 With diffuser	 20026.B With diffuser	 20026.N With diffuser
 20031 Customizable	 20031.B Customizable	 20031.N Customizable
 20021.C Bell symbol	 20021.C.B Bell symbol	 20021.C.N Bell symbol
 20021.L Light symbol	 20021.P.B Light symbol	 20021.L.N Light symbol
 20021.P Key symbol	 20021.P.B Key symbol	 20021.P.N Key symbol
 20021.99 O I symbols for 2P switches	 20021.99.B O I symbols for 2P switches	 20021.99.N O I symbols for 2P switches
 20031.PS 'Press' marked	 20031.PS.B 'Press' marked	 20031.PS.N 'Press' marked
1-module interchangeable buttons for axial controls (lightable°)		
 20131 No symbol	 20131.B No symbol	 20131.N No symbol
 20131.C Bell symbol	 20131.C.B Bell symbol	 20131.C.N Bell symbol
 20131.L Light symbol	 20131.L.B Light symbol	 20131.L.N Light symbol
 20131.P Key symbol	 20131.P.B Key symbol	 20131.P.N Key symbol
 20131.0 Customizable	 20131.0.B Customizable	 20131.0.N Customizable
2-module interchangeable buttons (lightable°)		
 20022 No symbol	 20022.B No symbol	 20022.N No symbol
 20027 With diffuser	 20027.B With diffuser	 20027.N With diffuser
 20032 Customizable	 20032.B Customizable	 20032.N Customizable
 20022.C Bell symbol	 20022.C.B Bell symbol	 20022.C.N Bell symbol
 20022.L Light symbol	 20022.L.B Light symbol	 20022.L.N Light symbol
 20022.P Key symbol	 20022.P.B Key symbol	 20022.P.N Key symbol
 20022.99 O I symbols for 2P switches	 20022.99.B O I symbols for 2P switches	 20022.99.N O I symbols for 2P switches
 20032.PS 'Press' marked	 20032.PS.B 'Press' marked	 20032.PS.N 'Press' marked

Devices

Grey	White	Next
2-module interchangeable buttons for axial controls (lightable°)		
 20132 No symbol	 20132.C Bell symbol	 20132.L Light symbol
 20132.P Key symbol	 20132.0 Customizable	 20132.B No symbol
 20132.C.B Bell symbol	 20132.L.B Light symbol	 20132.N No symbol
 20132.C.N Bell symbol	 20132.L.N Light symbol	
3-module interchangeable buttons (lightable°)		
 20023 No symbol	 20028 With diffuser	 20023.B No symbol
 20033 Customizable	 20023.C Bell symbol	 20028.B With diffuser
 20033.B Customizable	 20023.C.B Bell symbol	 20023.N No symbol
 20033.N Customizable	 20023.C.N Bell symbol	 20028.N With diffuser
1P special switches 250 V~		
 20050 NO 10 A, with lightable nameplate - 2 modules. Depth: 26,5 mm	 20052 NO 10 A cord-operated. Depth: 25,5 mm	 20053 NC 10 A cord-operated. Depth: 25,5 mm
 20050.B NO 10 A, with lightable nameplate - 2 modules. Depth: 26,5 mm	 20052.B NO 10 A cord-operated. Depth: 25,5 mm	 20053.B NC 10 A cord-operated. Depth: 25,5 mm
 20050.N NO 10 A, with lightable nameplate - 2 modules. Depth: 26,5 mm	 20052.N NO 10 A cord-operated. Depth: 25,5 mm	 20053.N NC 10 A cord-operated. Depth: 25,5 mm
 20097 NO 10 A 230 V~, for hotel "Do Not Disturb" and "Please Clean" lightable - 2 modules. Depth: 29 mm		
Additional 1P switches 250 V~		
 20056.33 10 A, NO + NC-contact, OFF symbol. Depth: 29,5 mm	 20056.34 10 A, NO + NC-contact, ON symbol. Depth: 29,5 mm	 20058 Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29,5 mm
 20056.33.B 10 A, NO + NC-contact, OFF symbol. Depth: 29,5 mm	 20056.34.B 10 A, NO + NC-contact, ON symbol. Depth: 29,5 mm	 20058.B Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29,5 mm
 20056.33.N 10 A, NO + NC-contact, OFF symbol. Depth: 29,5 mm	 20056.34.N 10 A, NO + NC-contact, ON symbol. Depth: 29,5 mm	 20058.N Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29,5 mm

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Devices

Grey

White

Next

1P push buttons 250 V~



20066
Two NO 10 A,
independents.
Depth: 29,5 mm



20066.B
Two NO 10 A,
independents.
Depth: 29,5 mm



20066.N
Two NO 10 A,
independents.
Depth: 29,5 mm

1P NO 10 A push buttons 250 V~ with indicator (for signalling units^o)

20068.B
White diffuser.
Depth: 29 mm



20068.B.B
White diffuser.
Depth: 29 mm



20068.B.N
White diffuser.
Depth: 29 mm



Δ 20068.R
Red diffuser.
Depth: 29 mm



Δ 20068.V
Green diffuser.
Depth: 29 mm



Δ 20068.R.B
Red diffuser.
Depth: 29 mm



Δ 20068.V.B
Green diffuser.
Depth: 29 mm



Δ 20068.R.N
Red diffuser.
Depth: 29 mm



Δ 20068.V.N
Green diffuser.
Depth: 29 mm

Switches 250 V~



20060
2P 10 AX
2-way switch,
OFF-central.
Depth: 34 mm



20062
2 1P NO 10 A
push buttons,
interlocked.
Depth: 29,5 mm



20060.B
2P 10 AX
2-way switch,
OFF-central.
Depth: 34 mm



20062.B
2 1P NO 10 A
push buttons,
interlocked.
Depth: 29,5 mm



20060.N
2P 10 AX
2-way switch,
OFF-central.
Depth: 34 mm



20062.N
2 1P NO 10 A
push buttons,
interlocked.
Depth: 29,5 mm

2P key-operated switches 250 V~ (add .CU to the basic code for switches with 000 unified key)



20082
16 AX 1-way switch,
key removable in
"O" (OFF) position.
Depth: 33,5 mm



20083
16 AX 1-way switch,
key removable in
both positions.
Depth: 33,5 mm



20082.B
16 AX 1-way switch,
key removable in
"O" (OFF) position.
Depth: 33,5 mm



20083.B
16 AX 1-way switch,
key removable in
both positions.
Depth: 33,5 mm



20082.N
16 AX 1-way switch,
key removable in
"O" (OFF) position.
Depth: 33,5 mm



20083.N
16 AX 1-way switch,
key removable in
both positions.
Depth: 33,5 mm



20086
NO 16 A push button,
key removable in "O"
position.
Depth: 33,5 mm



20086.B
NO 16 A push button,
key removable in "O"
position.
Depth: 33,5 mm



20086.N
NO 16 A push button,
key removable in "O"
position.
Depth: 33,5 mm

Devices

Grey

White

Next

Dimmers**

		
20135 MASTER, universal 20135.120 As above, 120 V~. Depth: 41,5 mm	20136 MASTER, universal, with potentiometer 20136.120 As above, 120 V~. Depth: 41,5 mm	20137 SLAVE, universal 20137.120 As above, 120 V~. Depth: 41,5 mm

		
20135.B MASTER, universal 20135.120.B As above, 120 V~. Depth: 41,5 mm	20136.B MASTER, universal, with potentiometer 20136.120.B As above, 120 V~. Depth: 41,5 mm	20137.B SLAVE, universal 20137.120.B As above, 120 V~. Depth: 41,5 mm

		
20135.N MASTER, universal 20135.120.N As above, 120 V~. Depth: 41,5 mm	20136.N MASTER, universal, with potentiometer 20136.120.N As above, 120 V~. Depth: 41,5 mm	20137.N SLAVE, universal 20137.120.N As above, 120 V~. Depth: 41,5 mm

	
20138 RGB, with potentiometer 20138.120 As above, 120 V~. Depth: 41,5 mm	20139 FADING-SHOW, with potentiometer 20139.120 As above, 120 V~. Depth: 41,5 mm

	
20138.B RGB, with potentiometer 20138.120.B As above, 120 V~. Depth: 41,5 mm	20139.B FADING-SHOW, with potentiometer 20139.120.B As above, 120 V~. Depth: 41,5 mm

	
20138.N RGB, with potentiometer 20138.120.N As above, 120 V~. Depth: 41,5 mm	20139.N FADING-SHOW, with potentiometer 20139.120.N As above, 120 V~. Depth: 41,5 mm



	
*20148 MASTER, 800 W/500 VA 120-230 V~. Depth: 41,5 mm	*20149 SLAVE, 800 W/500 VA 120-230 V~. Depth: 41,5 mm



	
*20148.B MASTER, 800 W/500 VA 120-230 V~. Depth: 41,5 mm	*20149.B SLAVE, 800 W/500 VA 120-230 V~. Depth: 41,5 mm

	
*20148.N MASTER, 800 W/500 VA 120-230 V~. Depth: 41,5 mm	*20149.N SLAVE, 800 W/500 VA 120-230 V~. Depth: 41,5 mm

Dimmers (fuse protected for British Standard boxes with depth equal or higher than 35 mm)**

	
*20140 MASTER, 700 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers *20142 As above, 500 VA - 2 modules Only for electronic transformers  Depth: 32,5 mm	*20141 SLAVE, 700 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers *20143 As above, 500 VA - 2 modules Only for electronic transformers  Depth: 32,5 mm

	
*20140.B MASTER, 700 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers *20142.B As above, 500 VA - 2 modules Only for electronic transformers  Depth: 32,5 mm	*20141.B SLAVE, 700 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers *20143.B As above, 500 VA - 2 modules Only for electronic transformers  Depth: 32,5 mm

	
*20140.N MASTER, 700 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers *20142.N As above, 500 VA - 2 modules Only for electronic transformers  Depth: 32,5 mm	*20141.N SLAVE, 700 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers *20143.N As above, 500 VA - 2 modules Only for electronic transformers  Depth: 32,5 mm

Devices

Grey

White

Next

Dimmers (fuse protected for British Standard boxes with depth equal or higher than 35 mm)**



20165
MASTER, 500 W
230 V~ - 2 modules.
For incandescent lamps
and ferromagnetic
transformers

20167
As above, 400 VA
- 2 modules.
Only for electronic
transformers



Depth: 32,5 mm



20166
SLAVE, 500 W
230 V~ - 2 modules.
For incandescent lamps
and ferromagnetic
transformers

20168
As above, 400 VA
- 2 modules.
Only for electronic
transformers



Depth: 32,5 mm



20165.B
MASTER, 500 W
230 V~ - 2 modules.
For incandescent lamps
and ferromagnetic
transformers

20167.B
As above, 400 VA
- 2 modules.
Only for electronic
transformers



Depth: 32,5 mm



20166.B
SLAVE, 500 W
230 V~ - 2 modules.
For incandescent lamps
and ferromagnetic
transformers

20168.B
As above, 400 VA
- 2 modules.
Only for electronic
transformers



Depth: 32,5 mm



20165.N
MASTER, 500 W
230 V~ - 2 modules.
For incandescent lamps
and ferromagnetic
transformers

20167.N
As above, 400 VA
- 2 modules.
Only for electronic
transformers



Depth: 32,5 mm



20166.N
SLAVE, 500 W
230 V~ - 2 modules.
For incandescent lamps
and ferromagnetic
transformers

20168.N
As above, 400 VA
- 2 modules.
Only for electronic
transformers



Depth: 32,5 mm

Electronic transformers (230-240 V~ 50/60 Hz)



01860.60
20-60 W,
12 V~ (SELV) output



01860.105
20-105 W,
12 V~ (SELV) output

Bleeder



01873
230 V~ 50 Hz, flush
mounting (rear side)
01873.120
As above, 120 V~

Electronic supply unit



01874
230 V~ 50 Hz, for controllable
LED lamps, 12-24 Vdc
01874.120 As above, 120 V~



01875
230 V~ 50 Hz, for controllable
LED lamps, 350/500/700 mA
01875.120 As above, 120 V~



01876
230 V~ 50 Hz, for controllable
LED RGB lamps, 12-24 Vdc
01876.120 As above, 120 V~

Touch switches (230 V~ with built-in touch sensor)



20120
Electronic
switch, NO
6 A relay.
Depth:
37 mm



20125
Dimmer,
40-500 W/V/A,
MASTER.
Depth:
41,5 mm



20123
Push button
for remote
control,
50/60 Hz.
Depth: 37 mm



20120.B
Electronic
switch, NO
6 A relay.
Depth:
37 mm



20125.B
Dimmer,
40-500 W/V/A,
MASTER.
Depth:
41,5 mm



20123.B
Push button
for remote
control,
50/60 Hz.
Depth: 37 mm



20120.N
Electronic
switch, NO
6 A relay.
Depth:
37 mm



20125.N
Dimmer,
40-500 W/V/A,
MASTER.
Depth:
41,5 mm




20123.N
Push button
for remote
control,
50/60 Hz.
Depth: 37 mm

Infrared switches



20172
Receiver, NO
6 A 230 V~
relay output,
50/60 Hz
20172.120
As above,
120 V~.
Depth: 37 mm



20173
Receiver, 4 A
230 V~ relay
outputs, for
rolling shutters
- 2 modules.
Depth: 37 mm



20175
Receiver,
40-450 W/V/A
dimmer, 230 V~.
Depth: 41,5 mm



20172.B
Receiver, NO
6 A 230 V~
relay output,
50/60 Hz
20172.120.B
As above,
120 V~.
Depth: 37 mm



20173.B
Receiver, 4 A
230 V~ relay
outputs, for
rolling shutters
- 2 modules.
Depth: 41,5 mm



20175.B
Receiver,
40-450 W/V/A
dimmer, 230 V~.
Depth: 41,5 mm



20172.N
Receiver, NO
6 A 230 V~
relay output,
50/60 Hz
20172.120.N
As above,
120 V~.
Depth: 37 mm



20173.N
Receiver, 4 A
230 V~ relay
outputs, for
rolling shutters
- 2 modules.
Depth: 37 mm





20175.N
Receiver,
40-450 W/V/A
dimmer, 230 V~.
Depth: 41,5 mm

**01849**

IR remote control, 14-channel

Devices • Socket outlets

Grey	White	Next			
Infrared switches					
 20181 Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz 20181.120 As above, 120 V~. Depth: 37 mm	 20184 For incandescent lamps, 60-300 W, 230 V~ 50/60 Hz. Depth: 37 mm	 20181.N Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz 20181.120.N As above, 120 V~. Depth: 37 mm			
 00800.14 Frame for orien- table support surface mounting	 00805.14 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm	 00801.14 Orientable support - 1 module	 20181.B Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz 20181.120.B As above, 120 V~. Depth: 37 mm	 20184.B For incandescent lamps, 60-300 W, 230 V~ 50/60 Hz. Depth: 37 mm	 20184.N For incandescent lamps, 60-300 W, 230 V~ 50/60 Hz. Depth: 37 mm
 00800.20 Frame for orien- table support surface mounting	 00805.20 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm	 00801.20 Orientable support - 1 module	 20183.B For emergency call, 2 NO 5 A 250 V~, 12 V~/12-24 Vdc (SELV) - 2 modules. Depth: 38,5 mm	 20183.N For emergency call, 2 NO 5 A 250 V~, 12 V~/12-24 Vdc (SELV) - 2 modules. Depth: 38,5 mm	
SICURY 2P+E Italian standard socket outlets 250 V~					
 20201 10 A, P11. Depth: 25 mm	 20201.B 10 A, P11. Depth: 25 mm	 20201.N 10 A, P11. Depth: 25 mm	 20203 Bpresa 16 A, P17/11. Depth: 25 mm	 20203.B Bpresa 16 A, P17/11. Depth: 25 mm	 20203.N Bpresa 16 A, P17/11. Depth: 25 mm
 20209 16 A, P30 - 2 modules. Depth: 29,4 mm	 20209.B 16 A, P30 - 2 modules. Depth: 29,4 mm	 20209.N 16 A, P30 - 2 modules. Depth: 29,4 mm	 20210 16 A, universal - 2 modules. Depth: 26 mm	 20210.B 16 A, universal - 2 modules. Depth: 26 mm	 20210.N 16 A, universal - 2 modules. Depth: 26 mm
SICURY 2P+E socket outlets 250 V~ (for dedicated supply lines)					
 20203.R Bpresa 16 A, P17/11, red. Depth: 25 mm	 20209.A 16 A, P30, orange - 2 modules. Depth: 29,4 mm	 20209.R 16 A, P30, red - 2 modules. Depth: 29,4 mm	 20209.V 16 A, P30, green - 2 modules. Depth: 29,4 mm	 20210.R 16 A, universal, red - 2 modules. Depth: 29,4 mm	

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Socket outlets

Grey

White

Next

USB supply unit 5 V



20293
5 V 1 A supply unit,
2 USB, 100-230 V~
50/60 Hz - 2 modules.
Depth: 37 mm



20293.B
5 V 1 A supply unit,
2 USB, 100-230 V~
50/60 Hz - 2 modules.
Depth: 37 mm



20293.N
5 V 1 A supply unit,
2 USB, 100-230 V~
50/60 Hz - 2 modules.
Depth: 37 mm

SICURY 2P+E interlocked socket outlets with CB and RCBO $I_{\Delta n}$ 10 mA, (120-230 V~ 50/60 Hz)

20273
Bresa 16 A P17/11 250 V~,
1P+N C 16 - 2 modules.
Depth: 39,7 mm



20273.B
Bresa 16 A P17/11 250 V~,
1P+N C 16 - 2 modules.
Depth: 39,7 mm



20273.N
Bresa 16 A P17/11 250 V~,
1P+N C 16 - 2 modules.
Depth: 39,7 mm



20276
16 A P30 250 V~,
1P+N C 16 - 3 modules.
Depth: 39,8 mm




20283
Bresa 16 A P17/11 250 V~,
1P+N C 16 - 3 modules.
Depth: 39,7 mm



20276.B
16 A P30 250 V~,
1P+N C 16 - 3 modules.
Depth: 39,8 mm



20283.B
Bresa 16 A P17/11 250 V~,
1P+N C 16 - 3 modules.
Depth: 39,7 mm



20276.N
16 A P30 250 V~,
1P+N C 16 - 3 modules.
Depth: 39,8 mm



20283.N
Bresa 16 A P17/11 250 V~,
1P+N C 16 - 3 modules.
Depth: 39,7 mm



20286
16 A P30 250 V~, 1P+N C 16
- 4 modules. Depth: 39,8 mm



20286.B
16 A P30 250 V~, 1P+N C 16
- 4 modules. Depth: 39,8 mm



20286.N
16 A P30 250 V~, 1P+N C 16
- 4 modules. Depth: 39,8 mm

Shaver supply units



20290
230 V~ 50/60 Hz, with 20 VA isolating
transformer, 230 V~ and 120 V~ outputs
- 3 modules. Depth: 42 mm



20290.B
230 V~ 50/60 Hz, with 20 VA isolating
transformer, 230 V~ and 120 V~ outputs
- 3 modules. Depth: 42 mm



20290.N
230 V~ 50/60 Hz, with 20 VA isolating
transformer, 230 V~ and 120 V~ outputs
- 3 modules. Depth: 42 mm



20291⁶
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
Depth: 41 mm






20291.B⁶
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
Depth: 41 mm



20291.N⁶
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
Depth: 41 mm

Socket outlets


Grey	White	Next						
Socket outlets 250 V~ - German standard								
 20208 SICURY 2P+E 16 A, German - 2 modules. Depth: 29,4 mm	 20208.C SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 31,2 mm	 20208.B SICURY 2P+E 16 A, German - 2 modules. Depth: 29,4 mm	 20208.C.B SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 31,2 mm	 20208.N SICURY 2P+E 16 A, German - 2 modules. Depth: 29,4 mm	 20208.C.N SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 31,2 mm			
Socket outlets 250 V~ - French standard								
 20212 SICURY 2P+E 16 A, French - 2 modules. Depth: 26,4 mm	 20212.C SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 28,3 mm	 20212.B SICURY 2P+E 16 A, French - 2 modules. Depth: 26,4 mm	 20212.C.B SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 28,3 mm	 20212.N SICURY 2P+E 16 A, French - 2 modules. Depth: 26,4 mm	 20212.C.N SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 28,3 mm			
Socket outlets 250 V~ - English standard								
 20214 SICURY 2P+E 5 A, English - 2 modules. Depth: 17,8 mm	 20219⁴ 2P+E 13 A, English - 2 modules. Depth: 17 mm	 20220 SICURY 2P+E 13 A, English - 2 modules. Depth: 24,4 mm	 20214.B SICURY 2P+E 5 A, English - 2 modules. Depth: 17,8 mm	 20219.B⁴ 2P+E 13 A, English - 2 modules. Depth: 17 mm	 20220.B SICURY 2P+E 13 A, English - 2 modules. Depth: 24,4 mm	 20214.N SICURY 2P+E 5 A, English - 2 modules. Depth: 17,8 mm	 20219.N⁴ 2P+E 13 A, English - 2 modules. Depth: 17 mm	 20220.N SICURY 2P+E 13 A, English - 2 modules. Depth: 24,4 mm
Socket outlets 250 V~ - Swiss standard								
 20226 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,75 mm	 20226.B 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,75 mm	 20226.N 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,75 mm						
Socket outlets 250 V~ - Euro-American standard								
 20234 SICURY 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28,5 mm	 20248 SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm	 20234.B SICURY 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28,5 mm	 20248.B SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm	 20234.N SICURY 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28,5 mm	 20248.N SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm			
 20249 Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm	 20249.B Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm	 20249.N Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm						

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Socket outlets

Grey	White	Next			
Socket outlets 127 V~ - USA and Saudi Arabian standards					
 20242 SICURY 2P+E 15 A, USA and Arabian. Depth: 27,4 mm	 20243 Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm	 20242.B SICURY 2P+E 15 A, USA and Arabian. Depth: 27,4 mm	 20243.B Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm	 20242.N SICURY 2P+E 15 A, USA and Arabian. Depth: 27,4 mm	 20243.N Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm
Socket outlets 250 V~ - Israeli standard					
 20240 SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm	 20240.B SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm	 20240.N SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm			
Socket outlets 250 V~ - Argentinian standard					
 20250 SICURY 2P+E 10 A, Argentinian. Depth: 27,5 mm	 20250.B SICURY 2P+E 10 A, Argentinian. Depth: 27,5 mm	 20250.N SICURY 2P+E 10 A, Argentinian. Depth: 27,5 mm			
Socket outlets 250 V~ - Chinese standard					
 20251 SICURY 2P+E 10 A, Chinese. Depth: 27,5 mm	 20251.B SICURY 2P+E 10 A, Chinese. Depth: 27,5 mm	 20251.N SICURY 2P+E 10 A, Chinese. Depth: 27,5 mm			
Socket outlets 250 V~ - Brazilian standard					
 20264 SICURY 2P+E 10 A, Brazilian. Depth: 31,5 mm	 20264.B SICURY 2P+E 10 A, Brazilian. Depth: 31,5 mm	 20264.N SICURY 2P+E 10 A, Brazilian. Depth: 31,5 mm	 20265 SICURY 2P+E 20 A, Brazilian. Depth: 31,5 mm	 20265.B SICURY 2P+E 20 A, Brazilian. Depth: 31,5 mm	 20265.N SICURY 2P+E 20 A, Brazilian. Depth: 31,5 mm
Socket outlets 250 V~ - Multistandard					
 20257 SICURY 2P+E 10 A, multistandard - 2 modules. Depth: 18,7 mm	 20257.B SICURY 2P+E 10 A, multistandard - 2 modules. Depth: 18,7 mm	 20257.N SICURY 2P+E 10 A, multistandard - 2 modules. Depth: 18,7 mm			

Socket outlets • Signal reception socket outlets

Grey

White

Next

Socket outlets 125 V~ - 2P+E 15 A 60 Hz American standard



21296
Double American standard with GFCI
- 3 modules. Depth: 33,4 mm



21296.B
Double American standard with GFCI
- 3 modules. Depth: 33,4 mm



21296.N
Double American standard with GFCI
- 3 modules. Depth: 33,4 mm

British standard socket outlets 250 V~ (with signalling unit 00930 included)



20221.L⁴
SICURY 2P+E 13 A,
1-gang, switched.
Depth: 17,5 mm



20222.L⁴
SICURY 2P+E 13 A, 2-gang,
switched. Depth: 17,5 mm



20221.L.B⁴
SICURY 2P+E 13 A,
1-gang, switched.
Depth: 17,5 mm



20222.L.B⁴
SICURY 2P+E 13 A, 2-gang,
switched. Depth: 17,5 mm



20221.L.N⁴
SICURY 2P+E 13 A,
1-gang, switched.
Depth: 17,5 mm



20222.L.N⁴
SICURY 2P+E 13 A, 2-gang,
switched. Depth: 17,5 mm



20215.L⁵
SICURY 2P+E 5 A,
1-gang, switched.
Depth: 17,5 mm



20217.L⁵
SICURY 2P+E 5 A,
1-gang, switched.
Depth: 25,5 mm



20215.L.B⁵
SICURY 2P+E 5 A,
1-gang, switched.
Depth: 17,5 mm



20217.L.B⁵
SICURY 2P+E 5 A,
1-gang, switched.
Depth: 25,5 mm



20215.L.N⁵
SICURY 2P+E 5 A,
1-gang, switched.
Depth: 17,5 mm



20217.L.N⁵
SICURY 2P+E 5 A,
1-gang, switched.
Depth: 25,5 mm

Special socket outlets



20331
2P 6 A 24 V
(SELV), for plug
01616/01617.
Depth: 25 mm



20333
5P DIN 41524
socket
connector.
Depth: 11 mm



20334
2P point-line
60130-9 IEC-07
socket connector.
Depth: 11 mm



20331.B
2P 6 A 24 V
(SELV), for plug
01616/01617.
Depth: 25 mm



20333.B
5P DIN 41524
socket
connector.
Depth: 11 mm



20334.B
2P point-line
60130-9 IEC-07
socket connector.
Depth: 11 mm



20331.N
2P 6 A 24 V
(SELV), for plug
01616/01617.
Depth: 25 mm



20333.N
5P DIN 41524
socket
connector.
Depth: 11 mm



20334.N
2P point-line
60130-9 IEC-07
socket connector.
Depth: 11 mm



20345
USB outlet,
screw
terminals.
Depth: 31,9 mm



20335
3 RCA outlets,
screw
terminals.
Depth: 23,4 mm



20345.B
USB outlet,
screw
terminals.
Depth: 31,9 mm



20335.B
3 RCA outlets,
screw
terminals.
Depth: 23,4 mm



20345.N
USB outlet,
screw
terminals.
Depth: 31,9 mm



20335.N
3 RCA outlets,
screw
terminals.
Depth: 23,4 mm



20346
HDMI outlet,
Keystone connection.
Depth: 24,4 mm



20348
VGA, 15-pin.
Depth: 11 mm



20346.B
HDMI outlet,
Keystone connection.
Depth: 24,4 mm



20348.B
VGA, 15-pin.
Depth: 11 mm



20346.N
HDMI outlet,
Keystone connection.
Depth: 24,4 mm





20348.N
VGA, 15-pin.
Depth: 11 mm

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Signal reception socket outlets

Grey	White	Next
Phone jack		
 20320 RJ11, 6-position, 4-contact (6/4). Depth: 33,6 mm	 20320.B RJ11, 6-position, 4-contact (6/4). Depth: 33,6 mm	 20320.N RJ11, 6-position, 4-contact (6/4). Depth: 33,6 mm
 20321 RJ12, 6-position, 6-contact (6/6). Depth: 33,6 mm	 20321.B RJ12, 6-position, 6-contact (6/6). Depth: 33,6 mm	 20321.N RJ12, 6-position, 6-contact (6/6). Depth: 33,6 mm
 20324 Israeli standard, screw terminals. Depth: 33,4 mm	 20324.B Israeli standard, screw terminals. Depth: 33,4 mm	 20324.N Israeli standard, screw terminals. Depth: 33,4 mm
 20327 8-contact, French standard - 2 modules. Depth: 22 mm	 20327.B 8-contact, French standard - 2 modules. Depth: 22 mm	 20327.N 8-contact, French standard - 2 modules. Depth: 22 mm
 20322 RJ11, 6-position 4-contact (6/4) + cover. Depth: 33,4 mm	 20322.B RJ11, 6-position 4-contact (6/4) + cover. Depth: 33,4 mm	 20322.N RJ11, 6-position 4-contact (6/4) + cover. Depth: 33,4 mm
 20323 RJ12, 6-position 6-contact (6/6) + cover. Depth: 33,4 mm	 20323.B RJ12, 6-position 6-contact (6/6) + cover. Depth: 33,4 mm	 20323.N RJ12, 6-position 6-contact (6/6) + cover. Depth: 33,4 mm
 20325⁷ BT, MASTER. Depth: 33,4 mm	 20325.B⁷ BT, MASTER. Depth: 33,4 mm	 20325.N⁷ BT, MASTER. Depth: 33,4 mm
 20326⁷ BT, SLAVE. Depth: 33,4 mm	 20326.B⁷ BT, SLAVE. Depth: 33,4 mm	 20326.N⁷ BT, SLAVE. Depth: 33,4 mm
EDP RJ45 socket connectors		
 20337.6 Cat. 6, UTP, shuttered. Depth: 26,1 mm	 20338.1 AT&T/Lucent T./Avaya. Cat. 5e, UTP. Depth: 22,3 mm	 20338.3 AMP/Tyco, Cat. 5e, FTP. Depth: 22,7 mm
 20338.4 AMP/Tyco, Cat. 5e, FTP. Depth: 32,1 mm	 20337.6.B Cat. 6, UTP, shuttered. Depth: 26,1 mm	 20338.1.B AT&T/Lucent T./Avaya. Cat. 5e, UTP. Depth: 22,3 mm
 20338.5 AMP/Tyco, Cat. 5e, FTP. Depth: 22,7 mm	 20338.3.B AMP/Tyco, Cat. 5e, UTP. Depth: 32,1 mm	 20338.4.B AMP/Tyco, Cat. 5e, UTP. Depth: 32,1 mm
 20338.8 Netsafe, Cat. 5e, UTP. Depth: 23,6 mm	 20338.8.B Netsafe, Cat. 5e, UTP. Depth: 23,6 mm	 20338.6.N Cat. 6, UTP, shuttered. Depth: 26,1 mm
 20339.4 Netsafe, Cat. 5e, UTP 110. Depth: 24,7 mm	 20339.4.B Netsafe, Cat. 5e, UTP 110. Depth: 24,7 mm	 20338.1.N AT&T/Lucent T./Avaya. Cat. 5e, UTP. Depth: 22,3 mm
 20339.5 Netsafe, Cat. 5e, FTP 110. Depth: 36,15 mm	 20339.5.B Netsafe, Cat. 5e, FTP 110. Depth: 36,15 mm	 20338.3.N AMP/Tyco, Cat. 5e, FTP. Depth: 22,7 mm
 20339.6 Netsafe, Cat. 6, UTP 110. Depth: 36,15 mm	 20339.6.B Netsafe, Cat. 6, UTP 110. Depth: 36,15 mm	 20338.4.N Cat. 6, UTP 110. Depth: 22,3 mm
 20339.11 Netsafe, Cat. 5e, UTP. Depth: 30,3 mm	 20339.11.B Netsafe, Cat. 5e, UTP. Depth: 30,3 mm	 20338.8.N Netsafe, Cat. 5e, UTP. Depth: 23,6 mm
 20339.13 Netsafe, Cat. 6, UTP. Depth: 30,3 mm	 20339.13.B Netsafe, Cat. 6, UTP. Depth: 30,3 mm	 20339.4.N Netsafe, Cat. 5e, UTP 110. Depth: 24,7 mm
 20339.14 Netsafe, Cat. 6, FTP. Depth: 30,3 mm	 20339.14.B Netsafe, Cat. 6, FTP. Depth: 30,3 mm	 20339.5.N Netsafe, Cat. 5e, FTP 110. Depth: 36,15 mm
 20339.11.N Netsafe, Cat. 5e, UTP. Depth: 30,3 mm	 20339.13.N Netsafe, Cat. 6, UTP. Depth: 30,3 mm	 20339.14.N Netsafe, Cat. 6, FTP. Depth: 30,3 mm

Signal reception socket outlets

Grey

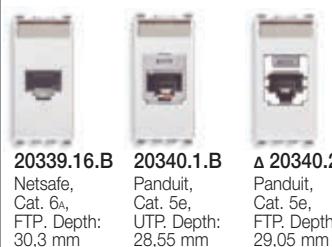
White

Next

EDP RJ45 socket connectors



20339.16 Netsafe, Cat. 6a, FTP. Depth: 30,3 mm
20340.1 Panduit, Cat. 5e, UTP. Depth: 28,55 mm
Δ 20340.2 Panduit, Cat. 5e, FTP. Depth: 29,05 mm



20339.16.B Netsafe, Cat. 6a, FTP. Depth: 30,3 mm
20340.1.B Panduit, Cat. 5e, UTP. Depth: 28,55 mm
Δ 20340.2.B Panduit, Cat. 5e, FTP. Depth: 29,05 mm

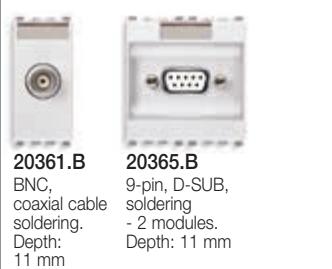


20339.16.N Netsafe, Cat. 6a, FTP. Depth: 30,3 mm
20340.1.N Panduit, Cat. 5e, UTP. Depth: 28,55 mm
Δ 20340.2.N Panduit, Cat. 5e, FTP. Depth: 29,05 mm

EDP socket connectors



20361 BNC, coaxial cable soldering. Depth: 11 mm
20365 9-pin, D-SUB, soldering - 2 modules. Depth: 11 mm

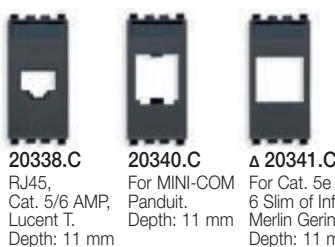


20361.B BNC, coaxial cable soldering. Depth: 11 mm
20365.B 9-pin, D-SUB, soldering - 2 modules. Depth: 11 mm

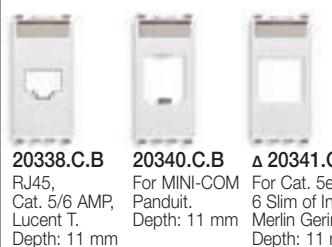


20361.N BNC, coaxial cable soldering. Depth: 11 mm
20365.N 9-pin, D-SUB, soldering - 2 modules. Depth: 11 mm

Adaptors for EDP connectors



20338.C RJ45, Cat. 5/6 AMP, Lucent T. Depth: 11 mm
20340.C For MINI-COM Panduit. Depth: 11 mm
Δ 20341.C For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 11 mm



20338.C.B RJ45, Cat. 5/6 AMP, Lucent T. Depth: 11 mm
20340.C.B For MINI-COM Panduit. Depth: 11 mm
Δ 20341.C.B For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 11 mm

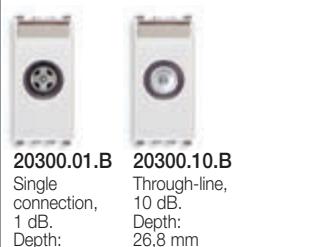


20338.C.N RJ45, Cat. 5/6 AMP, Lucent T. Depth: 11 mm
20340.C.N For MINI-COM Panduit. Depth: 11 mm
Δ 20341.C.N For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 11 mm

Coaxial TV-RD-SAT 5-2400 MHz socket outlets (output male and female)



20300.01 Single connection, 1 dB. Depth: 26,8 mm
20300.10 Through-line, 10 dB. Depth: 26,8 mm

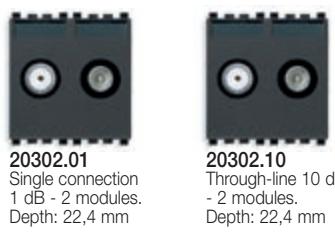


20300.01.B Single connection, 1 dB. Depth: 26,8 mm
20300.10.B Through-line, 10 dB. Depth: 26,8 mm

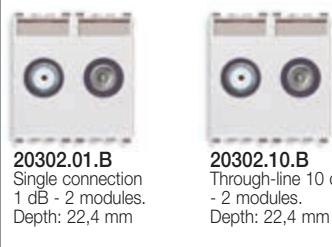


20300.01.N Single connection, 1 dB. Depth: 26,8 mm
20300.10.N Through-line, 10 dB. Depth: 26,8 mm

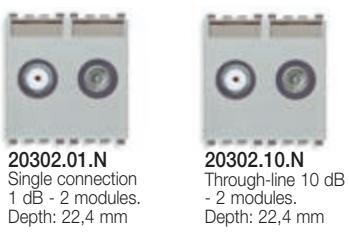
Coaxial TV-RD-SAT 5-2400 MHz socket outlets, demix (male and F-type outputs)



20302.01 Single connection 1 dB - 2 modules. Depth: 22,4 mm
20302.10 Through-line 10 dB - 2 modules. Depth: 22,4 mm



20302.01.B Single connection 1 dB - 2 modules. Depth: 22,4 mm
20302.10.B Through-line 10 dB - 2 modules. Depth: 22,4 mm



20302.01.N Single connection 1 dB - 2 modules. Depth: 22,4 mm
20302.10.N Through-line 10 dB - 2 modules. Depth: 22,4 mm

Signal reception socket outlets • Signalling

Grey

White

Next

Coaxial TV-FM-SAT 5-2400 MHz socket outlets (male, female and F-type outputs)



20303

Single connection 1 dB
- 2 modules. Depth: 20,5 mm



20303.B

Single connection 1 dB
- 2 modules. Depth: 20,5 mm



20303.N

Single connection 1 dB
- 2 modules. Depth: 20,5 mm

F-type socket outlets



20318

With F type
female connector.
Depth: 11 mm



20318.B

With F type
female connector.
Depth: 11 mm



20318.N

With F type
female connector.
Depth: 11 mm

Adaptors for coaxial TV-RD-SAT socket outlets



20319

For 2 or 3 outputs
- 2 modules



20319.B

For 2 or 3 outputs
- 2 modules



20319.N

For 2 or 3 outputs
- 2 modules

Terminal resistor and coaxial TV-RD-SAT 2400 MHz connectors



16330

Z 75 Ω, for
frequencies up to
2400 MHz



01644

Male, axial
cable entry



01645

Female, axial
cable entry



01634

Male,
90°-cable entry



01635

Female,
90°-cable entry



01654

Male F-type,
for RG59
cable

Electromechanical bells



20370

12 V~ (SELV)
50/60 Hz.
Depth: 37 mm



20372

120 V~
50/60 Hz.
Depth: 37 mm



20373

230 V~
50/60 Hz.
Depth: 37 mm



20370.B

12 V~ (SELV)
50/60 Hz.
Depth: 37 mm



20372.B

120 V~
50/60 Hz.
Depth: 37 mm



20373.B

230 V~
50/60 Hz.
Depth: 37 mm



20370.N

12 V~ (SELV)
50/60 Hz.
Depth: 37 mm



20372.N

120 V~
50/60 Hz.
Depth: 37 mm



20373.N

230 V~
50/60 Hz.
Depth: 37 mm

Electronic bells




20380

3-sound-sequence,
supply voltage 12 V~ and
12 Vdc (SELV) - 2 modules.
Depth: 37 mm



20380.B

3-sound-sequence,
supply voltage 12 V~ and
12 Vdc (SELV) - 2 modules.
Depth: 37 mm



20380.N

3-sound-sequence,
supply voltage 12 V~ and
12 Vdc (SELV) - 2 modules.
Depth: 37 mm

Signalling

Grey

White

Next

Buzzers

		
20375 12 V~ (SELV) 50/60 Hz. Depth: 37 mm	20377 120 V~ 50/60 Hz. Depth: 37 mm	20378 230 V~ 50/60 Hz. Depth: 37 mm

		
20375.B 12 V~ (SELV) 50/60 Hz. Depth: 37 mm	20377.B 120 V~ 50/60 Hz. Depth: 37 mm	20378.B 230 V~ 50/60 Hz. Depth: 37 mm

		
20375.N 12 V~ (SELV) 50/60 Hz. Depth: 37 mm	20377.N 120 V~ 50/60 Hz. Depth: 37 mm	20378.N 230 V~ 50/60 Hz. Depth: 37 mm

Luminous indicator units (for signalling units°)


20386.B White diffuser. Depth: 23 mm


20386.B.B White diffuser. Depth: 23 mm


20386.B.N White diffuser. Depth: 23 mm

		
△ 20386.A Orange diffuser. Depth: 23 mm	△ 20386.R Red diffuser. Depth: 23 mm	△ 20386.V Green diffuser. Depth: 23 mm

		
△ 20386.A.B Orange diffuser. Depth: 23 mm	△ 20386.R.B Red diffuser. Depth: 23 mm	△ 20386.V.B Green diffuser. Depth: 23 mm

		
△ 20386.A.N Orange diffuser. Depth: 23 mm	△ 20386.R.N Red diffuser. Depth: 23 mm	△ 20386.V.N Green diffuser. Depth: 23 mm

Double indicator units (for 2 signalling units°)


▲ 20388 Neutral diffusers. Depth: 23 mm


▲ 20388.B Neutral diffusers. Depth: 23 mm



▲ 20388.N Neutral diffusers. Depth: 23 mm

		
△ 20388.AV Orange and green diffusers. Depth: 23 mm	△ 20388.BR White and red diffusers. Depth: 23 mm	△ 20388.RV Red and green diffusers. Depth: 23 mm

		
△ 20388.AV.B Orange and green diffusers. Depth: 23 mm	△ 20388.BR.B White and red diffusers. Depth: 23 mm	△ 20388.RV.B Red and green diffusers. Depth: 23 mm

		
△ 20388.AV.N Orange and green diffusers. Depth: 23 mm	△ 20388.BR.N White and red diffusers. Depth: 23 mm	△ 20388.RV.N Red and green diffusers. Depth: 23 mm


Prismatic indicator units - 2 modules (for 14770, 14771, 14776 and 14777 lamps - supplied without lamp)




20387.A
Orange diffuser.
Depth: 25 mm



20387.B
White diffuser.
Depth: 25 mm



20387.R
Red diffuser.
Depth: 25 mm



20387.V
Green diffuser.
Depth: 25 mm

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Signalling

Grey

White

Next

Step marker lamps (with high-efficiency LED)



20381
230 V~ 50/60 Hz
20381.012
12 V~ 50/60 Hz or
12 Vdc (SELV).
Depth: 37 mm



20389
230 V~ 50/60 Hz
- 2 modules
20389.120
As above, 120 V~.
Depth: 37 mm



20381.B
230 V~ 50/60 Hz
20381.012.B
12 V~ 50/60 Hz or
12 Vdc (SELV).
Depth: 37 mm



20389.B
230 V~ 50/60 Hz
- 2 modules
20389.120.B
As above, 120 V~.
Depth: 37 mm



20381.N
230 V~ 50/60 Hz
20381.012.N
12 V~ 50/60 Hz or
12 Vdc (SELV).
Depth: 37 mm



20389.N
230 V~ 50/60 Hz
- 2 modules
20389.120.N
As above, 120 V~.
Depth: 37 mm



20389.012
12 V~ 50/60 Hz
or 12 Vdc (SELV)
- 2 modules.
Depth: 37 mm



20389.012.B
12 V~ 50/60 Hz
or 12 Vdc (SELV)
- 2 modules.
Depth: 37 mm




20389.012.N
12 V~ 50/60 Hz
or 12 Vdc (SELV)
- 2 modules.
Depth: 37 mm

Lighting devices



20383
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 37 mm



20383.B
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 37 mm



20383.N
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 37 mm



02671
With high-efficiency LED, 120-230 V~ 50/60 Hz
and built-in 7-module frame.
Depth: 44,7 mm

TORCIA, electronic hand-lamps (with automatic emergency device)



20395
With high-efficiency LED,
230 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20396
With high-efficiency LED,
120 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20395.B
With high-efficiency LED,
230 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20396.B
With high-efficiency LED,
120 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20395.N
With high-efficiency LED,
230 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20396.N
With high-efficiency LED,
120 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm

Signalling • Protection

Grey

White

Next

Emergency lighting devices (with automatic emergency device)



20382
With high-efficiency LED,
230 V~ 50/60 Hz.
Depth: 37 mm



20382.B
With high-efficiency LED,
230 V~ 50/60 Hz.
Depth: 37 mm



20382.N
With high-efficiency LED,
230 V~ 50/60 Hz.
Depth: 37 mm



20384
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 37 mm



20384.B
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 37 mm



20384.N
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 37 mm

Emergency lighting devices



02661
With high-efficiency LED, 230 V~ 50/60 Hz,
rechargeable Ni-Cd battery and built-in
7-module frame

△ 02661.120
As above 120 V~ 50/60 Hz.
Depth: 44,7 mm



20394
230 V~ 50/60 Hz, Ni-Cd battery, with FD 4W
G5 lamp and built-in 7-module frame.
Depth: 47,1 mm



02662
LED, controllable,
230 V~ 50 Hz
- 3 modules

02662.120
As above, 120 V~.
Depth: 39 mm



02663
LED RGB, controllable,
230 V~ 50 Hz
- 3 modules

02663.120
As above, 120 V~.
Depth: 39 mm

Rechargeable batteries



00908
3 x Ni-MH 1,2 V
800 mAh,
HR03 (AAA)



00910
Ni-MH 4,8 V 80 mAh
battery, spare part
for TORCIA



00911.1
Ni-Cd 2,4 V 1,3 Ah battery,
spare part for emergency
lighting devices (20394)



00913
Ni-Cd 4,8 V 800 mAh
spare rechargeable battery
for 02661 and 02661.120

Protection devices



20416
1P 16 A 250 V~
fuse carrier.
Depth: 29 mm



20417
230 V~ SPD transient
voltage suppressor.
Depth: 29 mm



20416.B
1P 16 A 250 V~
fuse carrier.
Depth: 29 mm



20417.B
230 V~ SPD transient
voltage suppressor.
Depth: 29 mm



20416.N
1P 16 A 250 V~
fuse carrier.
Depth: 29 mm



20417.N
230 V~ SPD transient
voltage suppressor.
Depth: 29 mm



20417.R
Spare part for
20417

Protection • Detection

Grey

White

Next

1P+N circuit breakers (120-230 V~ 50/60 Hz)



20405.06
C 6, breaking capacity 1500 A.
Depth: 39 mm

20405.10
C 10, breaking capacity 3000 A.
Depth: 39 mm

20405.16
C 16, breaking capacity 3000 A.
Depth: 39 mm



20405.06.B
C 6, breaking capacity 1500 A.
Depth: 39 mm

20405.10.B
C 10, breaking capacity 3000 A.
Depth: 39 mm

20405.16.B
C 16, breaking capacity 3000 A.
Depth: 39 mm



20405.06.N
C 6, breaking capacity 1500 A.
Depth: 39 mm

20405.10.N
C 10, breaking capacity 3000 A.
Depth: 39 mm

20405.16.N
C 16, breaking capacity 3000 A.
Depth: 39 mm

1P+N residual current breakers with overcurrent protection (RCBO) (120-230 V~ 50/60 Hz \square)



20411.06
C 6, $I_{\Delta n}$ 10 mA
breaking capacity 1500 A - 2 modules.
Depth: 39 mm



20411.06.B
C 6, $I_{\Delta n}$ 10 mA
breaking capacity 1500 A - 2 modules.
Depth: 39 mm

20411.10.B
C 10, $I_{\Delta n}$ 10 mA
breaking capacity 3000 A - 2 modules.
Depth: 39 mm



20411.06.N
C 6, $I_{\Delta n}$ 10 mA
breaking capacity 1500 A - 2 modules.
Depth: 39 mm

20411.10.N
C 10, $I_{\Delta n}$ 10 mA
breaking capacity 3000 A - 2 modules.
Depth: 39 mm



20411.16
C 16, $I_{\Delta n}$ 10 mA
breaking capacity 3000 A - 2 modules.
Depth: 39 mm



20411.16.B
C 16, $I_{\Delta n}$ 10 mA
breaking capacity 3000 A - 2 modules.
Depth: 39 mm

20411.16.6.B
C 16, $I_{\Delta n}$ 6 mA
breaking capacity 3000 A - 2 modules.
Depth: 39 mm



20411.16.N
C 16, $I_{\Delta n}$ 10 mA
breaking capacity 3000 A - 2 modules.
Depth: 39 mm

20411.16.6.N
C 16, $I_{\Delta n}$ 6 mA
breaking capacity 3000 A - 2 modules.
Depth: 39 mm

Detectors (230 V~ 50/60 Hz)



20420
Gas Stop Metano, methane gas detector, solenoid valve control - 3 modules.
Depth: 37 mm



20420.B
Gas Stop Metano, methane gas detector, solenoid valve control - 3 modules.
Depth: 37 mm

20421.B
Gas Stop GPL, LPG gas detector, solenoid valve control - 3 modules.
Depth: 37 mm



20420.N
Gas Stop Metano, methane gas detector, solenoid valve control - 3 modules.
Depth: 37 mm

20421.N
Gas Stop GPL, LPG gas detector, solenoid valve control - 3 modules.
Depth: 37 mm



20422
CO Stop, carbone monoxide detector, 6 A 230 V~ change-over relay output - 3 modules.
Depth: 37 mm



20422.B
CO Stop, carbone monoxide detector, 6 A 230 V~ change-over relay output - 3 modules.
Depth: 37 mm



20422.N
CO Stop, carbone monoxide detector, 6 A 230 V~ change-over relay output - 3 modules.
Depth: 37 mm



16590
3/4" NO manually resettable solenoid valve



01899
Gas test cylinder for testing Gas Stop Metano and GPL detectors

[Grey](#)
[White](#)
[Next](#)

Switches for fan-coil regulation



20095
Slide, 1P 6(2) A
250 V~, 4-position.
Depth: 40 mm



20096
Rotary, 1P 6(3) A 250 V~,
4-position - 2 modules.
Depth: 37 mm



20095.B
Slide, 1P 6(2) A
250 V~, 4-position -
2 modules.
Depth: 40 mm



20096.B
Rotary, 1P 6(3) A 250 V~,
4-position - 2 modules.
Depth: 37 mm



20095.N
Slide, 1P 6(2) A
250 V~, 4-position.
Depth: 40 mm



20096.N
Rotary, 1P 6(3) A 250 V~,
4-position - 2 modules.
Depth: 37 mm

Electronic thermostats (heating and air-conditioning, 120-230 V~ 50/60 Hz)



02950
Touch screen thermostat for ON/OFF and PID
temperature control, 1 input for temperature
sensor, 1 multi-function input, 5(2) A 230 V~
change-over relay output - 2 modules.
Depth: 38,5 mm



Δ 20440
For residential sector,
6(2) A 230 V~ change-over
relay output - 2 modules.
Depth: 37 mm



Δ 20440.B
For residential sector,
6(2) A 230 V~ change-over
relay output - 2 modules.
Depth: 37 mm



Δ 20440.N
For residential sector,
6(2) A 230 V~ change-over
relay output - 2 modules.
Depth: 37 mm

Electronic timer-thermostats (heating and air-conditioning)



02955
Touch screen timer-thermostat for ON/OFF and PID
temperature control, 1 input for temperature sensor,
1 multi-function input, 1 RJ9 input for energy meter (02960),
5(2) A 230 V~ change-over relay output - 3 modules.
Depth: 35,3 mm



20445
6(2) A 230 V~ change-over
relay output, 120-230 V~
50/60 Hz - 2 modules.
Depth: 37 mm



20445.B
6(2) A 230 V~ change-over
relay output, 120-230 V~
50/60 Hz - 2 modules.
Depth: 37 mm



20445.N
6(2) A 230 V~ change-over
relay output, 120-230 V~
50/60 Hz - 2 modules.
Depth: 37 mm



20446
5(2) A 250 V~ change-over relay
output, AA LR6 1,5 V battery
(supplied) - 3 modules.
Depth: 43 mm



20446.B
5(2) A 250 V~ change-over relay
output, AA LR6 1,5 V battery
(supplied) - 3 modules.
Depth: 43 mm



20446.N
5(2) A 250 V~ change-over relay
output, AA LR6 1,5 V battery
(supplied) - 3 modules.
Depth: 43 mm

Comfort

Grey

White

Next

Temperature sensor and moisture meter



20432
Electronic
temperature sensor.
Depth: 24,4 mm



20432.B
Electronic
temperature sensor.
Depth: 24,4 mm



20432.N
Electronic
temperature sensor.
Depth: 24,4 mm




02965
Wired temperature sensor,
4 m cable length



20433
Electronic humidity sensor,
1 0-10 V or 4-20 mA
output- 2 modules.
Depth: 37 mm



20433.B
Electronic humidity sensor,
1 0-10 V or 4-20 mA
output- 2 modules.
Depth: 37 mm



20433.N
Electronic humidity sensor,
1 0-10 V or 4-20 mA
output - 2 modules.
Depth: 37 mm

Clocks (120-230 V~ 50/60 Hz)



20448
24h/7day timer-switch, 1-canal,
8 A 230 V~ change-over relay
output - 2 modules.
Depth: 37 mm



20448.B
24h/7day timer-switch, 1-canal,
8 A 230 V~ change-over relay
output - 2 modules.
Depth: 37 mm



20448.N
24h/7day timer-switch, 1-canal,
8 A 230 V~ change-over relay
output - 2 modules.
Depth: 37 mm



20449
Electronic alarm
clock - 2 modules.
Depth: 37 mm



20449.B
Electronic alarm
clock - 2 modules.
Depth: 37 mm



20449.N
Electronic alarm
clock - 2 modules.
Depth: 37 mm

By-me: home automation system

[Grey](#)
[White](#)
[Next](#)

Supervising - 10" IP multimedia video touch screen


21553.1

10" IP multimedia video touch screen for Due Fili Plus video door system and By-me system supervising by web server

Supervising - Video touch screen


21554

4,3" Full Flat, for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame. Depth: 46,7 mm


21554.B

4,3" Full Flat, for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame. Depth: 46,7 mm


21554.BN

4,3" Full Flat, for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame. Depth: 46,7 mm

Supervising - Touch screens


21511

4,3" Full Flat, for control, temperature sensor input, with built-in 8-module mounting frame. Depth: 39,9 mm


21511.B

4,3" Full Flat, for control, temperature sensor input, with built-in 8-module mounting frame. Depth: 39,9 mm


21511.BN

4,3" Full Flat, for control, temperature sensor input, with built-in 8-module mounting frame. Depth: 39,9 mm


△ 21512.1

For control, temperature sensor input - 3 modules. Depth: 37 mm


△ 20512

Monochrome touch screen for local control - 3 modules. Depth: 37 mm


△ 21512.1.B

For control, temperature sensor input - 3 modules. Depth: 37 mm


△ 20512.B

Monochrome touch screen for local control - 3 modules. Depth: 37 mm


△ 21512.1.BN

For control, temperature sensor input - 3 modules. Depth: 37 mm


△ 20512.N

Monochrome touch screen for local control - 3 modules. Depth: 37 mm


△ 20511.1

Color touch screen, 4,3", Energy, for control, 1 temperature sensor input, with built-in 8-module mounting frame. Depth: 25,5 mm


△ 20511.1.B

Color touch screen, 4,3", Energy, for control, 1 temperature sensor input, with built-in 8-module mounting frame. Depth: 25,5 mm


△ 20511.1.N

Color touch screen, 4,3", Energy, for control, 1 temperature sensor input, with built-in 8-module mounting frame. Depth: 25,5 mm

By-me: home automation system

Grey

White

Next

Supervising - Devices for DIN rail (60715 TH35) installation



01942
GSM phone dial, for direct connection to Bus 12-24 V~ 50/60 Hz or 12-30 Vdc (SELV)



01945
Web server for local and remote control of the By-me system via IP

System components - Devices for DIN rail (60715 TH35) installation



01400
Supply unit, 29 Vdc
400 mA output,
230 V~ 50/60 Hz



01401
Supply unit, 29 Vdc
1280 mA output,
120-230 V~ 50/60 Hz



01468
Logic unit for logic, mathematical, timing and messaging functions



01845
Line coupler



Δ 01842
Decoupling coil

Control units



21509
For control and configuration, touch display, temperature sensor input, for DIN rail (60715 TH35) or mounting installation - 3 modules.
Depth: 37 mm



21509.B
For control and configuration, touch display, temperature sensor input, for DIN rail (60715 TH35) or mounting installation - 3 modules.
Depth: 37 mm



21509.N
For control and configuration, touch display, temperature sensor input, for DIN rail (60715 TH35) or mounting installation - 3 modules.
Depth: 37 mm



Δ 20510°
Control unit - 2 modules.
Not suitable for using with Eikon Tactil electronic devices and loads control range devices (20537, 20584.1, 01451, 01452, 01457, 01458, 01459, 01450, 01455, 01456, 01465, 01466, 01467).
Depth: 26,5 mm



Δ 20510.B°
Control unit - 2 modules.
Not suitable for using with Eikon Tactil electronic devices and loads control range devices (20537, 20584.1, 01451, 01452, 01457, 01458, 01459, 01450, 01455, 01456, 01465, 01466, 01467).
Depth: 26,5 mm



Δ 20510.N°
Control unit - 2 modules.
Not suitable for using with Eikon Tactil electronic devices and loads control range devices (20537, 20584.1, 01451, 01452, 01457, 01458, 01459, 01450, 01455, 01456, 01465, 01466, 01467).
Depth: 26,5 mm

Flush mounting monitor - 8 modules



Δ 21550
3,5" LCD, to complete with control unit, video door entry or CCTV modules, with built-in 8-module mounting frame.
To complete with Eikon Evo cover plates.
Depth: 25,5 mm



Δ 21550.B
3,5" LCD, to complete with control unit, video door entry or CCTV modules, with built-in 8-module mounting frame.
To complete with Eikon Evo cover plates.
Depth: 25,5 mm



Δ 21550.N
3,5" LCD, to complete with control unit, video door entry or CCTV modules, with built-in 8-module mounting frame.
To complete with Eikon Evo cover plates.
Depth: 25,5 mm

Δ 20550
As above.
To complete with Eikon cover plates, except for Eikon Evo cover plates.
Depth: 25,5 mm

Δ 20550.B
As above.
To complete with Eikon cover plates, except for Eikon Evo cover plates.
Depth: 25,5 mm

Δ 20550.N
As above.
To complete with Eikon cover plates, except for Eikon Evo cover plates.
Depth: 25,5 mm

By-me: home automation system

[Grey](#)
[White](#)
[Next](#)

Color monitor modules



Δ 01960°
Control unit module.
Not suitable for using with Eikon Tactil electronic devices and loads control range devices (20537, 20584.1, 01451, 01452, 01457, 01458, 01459, 01450, 01455, 01456, 01465, 01466, 01467).



Δ 01961°
Sound System video door entry system module



Δ 01962°
DigiBus video door entry system module



01963°
Due Fili Plus video door entry system module



Δ 01964°
CCTV system module

Video door entry - Devices



20557
Speakerphone for Due Fili Plus system - 3 modules
Δ 20555 As above, for Sound System
Δ 20556 As above, for DigiBus system
 Depth: 37 mm



20557.B
Speakerphone for Due Fili Plus system - 3 modules
Δ 20555.B As above, for Sound System
Δ 20556.B As above, for DigiBus system
 Depth: 37 mm



20557.N
Speakerphone for Due Fili Plus system - 3 modules
Δ 20555.N As above, for Sound System
Δ 20556.N As above, for DigiBus system
 Depth: 37 mm



20577
Call button for Due Fili Plus system - 3 modules
Δ 20575 As above, for Sound System
Δ 20576 As above, for DigiBus system
 Depth: 37 mm



20577.B
Call button for Due Fili Plus system - 3 modules
Δ 20575.B As above, for Sound System
Δ 20576.B As above, for DigiBus system
 Depth: 37 mm



20577.N
Call button for Due Fili Plus system - 3 modules
Δ 20575.N As above, for Sound System
Δ 20576.N As above, for DigiBus system
 Depth: 37 mm

Video door entry - Devices



20560
Inner color video camera.
 Depth: 37 mm



20565
Inner color video camera and built-in microphone - 2 modules.
 Depth: 26,5 mm



20560.B
Inner color video camera.
 Depth: 37 mm



20565.B
Inner color video camera and built-in microphone - 2 modules.
 Depth: 26,5 mm



20560.N
Inner color video camera.
 Depth: 37 mm



20565.N
Inner color video camera and built-in microphone - 2 modules.
 Depth: 26,5 mm



20570
Inner light, with LED.
 Depth: 37 mm



20570.B
Inner light, with LED.
 Depth: 37 mm



20570.N
Inner light, with LED.
 Depth: 37 mm

By-me: home automation system

Grey

White

Next

Energy management - Temperature control



02951
Touch screen thermostat for ON/OFF, PWM and PID temperature control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor, grey - 2 modules.
Depth: 38,5 mm



02951.B
Touch screen thermostat for ON/OFF, PWM and PID temperature control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor, white - 2 modules.
Depth: 38,5 mm



20513
Thermostat with display, for fan-coil - 2 modules.
Depth: 26,5 mm



20514
Thermostat with display - 2 modules.
Depth: 26,5 mm



20513.B
Thermostat with display, for fan-coil - 2 modules.
Depth: 26,5 mm



20514.B
Thermostat with display - 2 modules.
Depth: 26,5 mm



20513.N
Thermostat with display, for fan-coil - 2 modules.
Depth: 26,5 mm



20514.N
Thermostat with display - 2 modules.
Depth: 26,5 mm



20538
Temperature probe for ON/OFF, PWM, PID and dew point control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor - 2 modules.
Depth: 40 mm



20433
Electronic humidity sensor, 1 0-10 V or 4-20 mA output - 2 modules.
Depth: 37 mm



20432
Electronic temperature sensor.
Depth: 24,4 mm



20538.B
Temperature probe for ON/OFF, PWM, PID and dew point control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor - 2 modules.
Depth: 40 mm



20433.B
Electronic humidity sensor, 1 0-10 V or 4-20 mA output - 2 modules.
Depth: 37 mm



20432.B
Electronic temperature sensor.
Depth: 24,4 mm



20538.N
Temperature probe for ON/OFF, PWM, PID and dew point control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor - 2 modules.
Depth: 40 mm



20433.N
Electronic humidity sensor, 1 0-10 V or 4-20 mA output - 2 modules.
Depth: 37 mm



20432.N
Electronic temperature sensor.
Depth: 24,4 mm



02965
Wired temperature sensor,
4 m cable length

Energy management - Weather station



01546
Weather station,
KNX standard, power supply
12-32 Vdc or 12-24 Vac

By-me: home automation system

Grey

White

Next

Energy management - Loads control



20537
Actuator with relay output 16 A
120-230 V~ 50/60 Hz with
incorporated current sensor
- 2 modules. Depth: 37 mm



20584.1
Interface for By-me
devices and IR receiver,
with 3 m of cable.
Depth: 41 mm

△ **20584**
As above



20537.B
Actuator with relay output 16 A
120-230 V~ 50/60 Hz with
incorporated current sensor
- 2 modules. Depth: 37 mm



20584.1.B
Interface for By-me
devices and IR receiver,
with 3 m of cable.
Depth: 41 mm

△ **20584.B**
As above



20537.N
Actuator with relay output 16 A
120-230 V~ 50/60 Hz with
incorporated current sensor
- 2 modules. Depth: 37 mm



20584.1.N
Interface for By-me
devices and IR receiver,
with 3 m of cable.
Depth: 41 mm

△ **20584.N**
As above



01451
Energy meter with
incorporated current
sensor, measurable
powers up to 3680 W,
flush mounting (retrofit)



01452
Pulse counter interface
for measuring data
from devices fitted with
pulse outputs, such as
electricity, water and gas
meters, flush mounting
(retrofit)



01457
Toroidal current sensor
for load control and
power measurement,
hole diameter 7,5 mm,
cable length 40 cm



01458
Toroidal current sensor
for load control and
power measurement,
hole diameter 19 mm,
cable length 40 cm



01459
Toroidal differential
current sensor for power
measurement, hole
diameter 9 mm,
cable length 40 cm

Energy management - Loads control - Devices for DIN rail (60715 TH35) installation



01450
Energy meter, 3 x inputs
toroidal sensor,
25 W-100 kW,
120-230 V 50/60 Hz,
230/400 V 50/60 Hz.
Supplied with toroidal
current sensor 01457



01455
Load control module,
3 x inputs toroidal
sensor, 25 W-100 kW,
120-230 V 50/60 Hz,
230/400 V 50/60 Hz.
Supplied with toroidal
current sensor 01457



01456
Actuator, 16 A
120-230 V~
50/60 Hz relay
output for toroidal
differential
current sensor



01465
Climate control device for
heating systems, power
supply 120-230 V~ 50/60 Hz,
3 inputs for PT100, PT1000
and NTC probes, 1 mixer valve
control output, 1 0-10 V or (0)
4-20 mA output, 1 16 A 230 V~
change-over relay output



01466
Actuator with 4 (0)4-20 mA
or 0-10 V proportional
analogue outputs with max
scalable voltage output,
120-230 V~ 50/60 Hz



01467
Device with 3 analogue
signal inputs, 1 0-10 V
or 4-20 mA input, 1 NTC
sensor input, 1 brightness
sensor 01530 input

Automation - Eikon Tactil devices



21520
4 programmable buttons for 2 single
controls or scenes - 2 modules.
Depth: 38 mm



21540
6 programmable buttons for 3 single
controls or scenes - 2 modules.
Depth: 38 mm

Automation - Labels



21847

8 sheets of stickers with
symbols and words for
Eikon Tactil devices

By-me: home automation system

Grey

White

Next

Automation - Devices



20520
2 simple push buttons - 2 modules.
Depth: 26,5 mm



20525
2 simple push buttons +
8 A 120-230 V~ change-over relay output actuator - 2 modules.
Depth: 37 mm



20521
2 rocker push buttons - 2 modules.
Depth: 26,5 mm



20526
2 rocker push buttons +
8 A 120-230 V~ change-over relay output actuator - 2 modules.
Depth: 37 mm




20527
2 rocker push buttons +
actuator 1 roller shutter laths positioning, cosφ 0,6 2 A 120-230 V~ - 2 modules.
Depth: 37 mm



20527.1
2 rocker push buttons +
actuator 1 roller shutter laths positioning, cosφ 0,6 2 A 120-230 V~ - 2 modules.
Depth: 37 mm



20529
2 rocker push buttons +
SLAVE-dimmer actuator - 2 modules. Depth: 37 mm



20529.120
2 rocker push buttons + 120 V~
SLAVE-dimmer actuator - 2 modules. Depth: 37 mm


Automation - Devices




20540
3 simple push buttons - 3 modules.
Depth: 37 mm




20545
3 simple push buttons + 8 A 120-230 V~ change-over relay output actuator - 3 modules.
Depth: 37 mm



20541
3 rocker push buttons - 3 modules.
Depth: 37 mm



20546
3 rocker push buttons + 8 A 120-230 V~ change-over relay output actuator - 3 modules.
Depth: 37 mm



20547
3 rocker push buttons + 3,5 A 120-230 V~ actuator for 1 rolling shutter - 3 modules.
Depth: 37 mm



20549
3 rocker push buttons +
40-300 W / 40-200 VA MASTER dimmer actuator - 3 modules.
Depth: 37 mm

Automation - 1-module interchangeable buttons




20531
No symbol, for simple push buttons
20531.0
As above, customizable



20531.S
No symbol, for rocker push buttons
20531.S0
As above, customizable



20531.20
ON/OFF symbol for rocker push buttons
20531.21



Arrows symbol, for rocker push buttons
20531.0.B
As above, customizable



20531.B
No symbol, for simple push buttons
20531.0.B
As above, customizable



20531.S.B
No symbol, for rocker push buttons
20531.S0.B
As above, customizable



20531.20.B
ON/OFF symbol for rocker push buttons
20531.21.B
Arrows symbol, for rocker push buttons



20531.N
No symbol, for simple push buttons
20531.0.N
As above, customizable



20531.S.N
No symbol, for rocker push buttons
20531.S0.N
As above, customizable



20531.20.N
ON/OFF symbol for rocker push buttons
20531.21.N
Arrows symbol, for rocker push buttons



20531.1T
1 name-plate, simple push buttons



20531.2T
2 name-plates, for rocker push buttons



20531.25
Universal regulation symbols, for rocker push buttons



20531.1T.B
1 name-plate, simple push buttons



20531.2T.B
2 name-plates, for rocker push buttons



20531.25.B
Universal regulation symbols, for rocker push buttons



20531.1T.N
1 name-plate, simple push buttons



20531.2T.N
2 name-plates, for rocker push buttons
20531.25.N
Universal regulation symbols, for rocker push buttons

By-me: home automation system

Grey	White	Next
Automation - 2-module interchangeable buttons		
		
20532 No symbol, for simple push buttons 20532.0 As above, customizable	20532.S No symbol, for rocker push buttons 20532.S0 As above, customizable	20532.20 ON/OFF symbol for rocker push buttons
		
20532.21 Arrows symbol, for rocker push buttons	20532.21T 1 name-plate, for simple push buttons	20532.25 Universal regulation symbols, for rocker push buttons
		
20532.B No symbol, for simple push buttons 20532.0.B As above, customizable	20532.S.B No symbol, for rocker push buttons 20532.S0.B As above, customizable	20532.20.B ON/OFF symbol for rocker push buttons
		
20534 Actuator 6 A 120-230 V~ change-over relay output. Depth: 40 mm	20535 Actuator 16 A 120-230 V~ change-over relay output - 2 modules. Depth: 37 mm	20534.B Actuator 6 A 120-230 V~ change-over relay output - 2 modules. Depth: 40 mm
		
20515 Interface for traditional switches 230 V~/12-24 Vac/dc - 2 modules. Depth: 37 mm	20518 Interface for traditional controls. Depth: 40 mm	20515.B Interface for traditional switches 230 V~/12-24 Vac/dc - 2 modules. Depth: 37 mm
		
20516 Remote control receiver - 2 modules. Depth: 26,5 mm	20516.B Remote control receiver - 2 modules. Depth: 26,5 mm	20516.N Remote control receiver - 2 modules. Depth: 26,5 mm

01849
IR remote control, 14-channel

By-me: home automation system

Grey	White	Next
Automation - Devices		
		
20486 Oriental IR presence detector - 2 modules. Depth: 26,5 mm	20485 IR presence detector - 2 modules. Depth: 26,5 mm	20487 IR and microwaves presence detector - 2 modules. Depth: 26,5 mm
		
00802.14 Oriental support - 2 modules	00805.14 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm	00800.14 Frame for orientable support surface mounting
		
00802 Oriental support - 2 modules	00805 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm	00800 Frame for orientable support surface mounting
		
00802.20 Oriental support - 2 modules	00805.20 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm	00800.20 Frame for orientable support surface mounting
Radiofrequency home automation - With EnOcean module		
		
20505 2 flat rocker buttons with EnOcean wireless connection, no battery, to complete with 20506 - 2 modules. Depth: 3,5 mm	01796 Actuator with EnOcean module, relay output, supply voltage 230 V~ 50 Hz	
		
20507 Frame for surface mounting of 20505, grey	20507.B Frame for surface mounting of 20505, white	21507 Frame for surface mounting of 20505, only for Eikon Evo cover plate, grey
		
		
20506 Pair of buttons for 20505 device, customizable	20508 Bus-RF interface - 2 modules	20506.B Pair of buttons for 20505 device, customizable
		
20508 Bus-RF interface - 2 modules	20508.B Bus-RF interface - 2 modules	20508.N Bus-RF interface - 2 modules

By-me: home automation system

Automation - Electronic transformers (230-240 V~ 50/60 Hz)



01860.60
20-60 W,
12 V~ (SELV) output



01860.105
20-105 W,
12 V~ (SELV) output

Automation - Electronic supply unit



01874
230 V~ 50 Hz, for controllable
LED lamps, 12-24 Vdc
01874.120
As above, 120 V~



01875
230 V~ 50 Hz, for controllable
LED lamps, 350/500/700 mA
01875.120
As above, 120 V~



01876
230 V~ 50 Hz, for controllable
LED RGB lamps, 12-24 Vdc
01876.120
As above, 120 V~



01877
For controllable LED RGB lamps,
12-24 Vdc
01877.120
As above, 120 V~

Automation - Devices for DIN rail (60715 TH35) installation



01850.2
Actuator with
16 A 120-230 V~
change-over relay
output



01851.2
Actuator with 4 16 A
120-230 V~ change-
over relay outputs,
with fan-coil function



01852.2
Actuator for 2 roller
blinds with lath
positioning, 16 A
120-230 V~ change-
over relay output



01856
Actuator 0-10 Vdc
for ballast control,
120-230 V~ change-
over relay output



***01861**
MASTER dimmer,
40-1000 W/V/A,
230 V~,
MOSFET+TRIAC



***01862**
SLAVE dimmer,
40-1000 W/V/A, 230 V~,
MOSFET+TRIAC



01863
MASTER dimmer,
40-800 W/V/A 50 Hz,
40-700 W/V/A 60 Hz,
230 V~,
MOSFET+TRIAC



01864
SLAVE dimmer,
40-800 W/V/A 50 Hz,
40-700 W/V/A 60 Hz,
230 V~,
MOSFET+TRIAC



***01865**
MASTER dimmer,
40-700 VA, 230 V~
50/60 Hz, MOSFET



***01866**
SLAVE dimmer,
40-700 VA, 230 V~
50/60 Hz, MOSFET



01867
MASTER dimmer,
40-500 VA 50 Hz,
40-400 VA 60 Hz,
230 V~, MOSFET



01868
SLAVE dimmer,
40-500 VA 50 Hz,
40-400 VA 60 Hz,
230 V~, MOSFET



01870
MASTER dimmer,
40-500 W, 40-300 VA,
CFL 10-200 W, LED
3-200 W, 230 V~



01871
SLAVE dimmer,
40-500 W, 40-300 VA,
CFL 10-200 W, LED
3-200 W, 230 V~
01871.120
As above, 120 V~



01975
Actuator with 1-10 Vdc
30 mA output for LED
control, 120-230 V~
2,5 A change-over
relay output, 120-230 V~
50/60 Hz



01976
Actuator with 1-10 Vdc
30 mA output for LED
control, 12-24 V 10 A
relay output, 12-24 V~
50/60 Hz or 12-24 Vdc

By-me: home automation system

Grey

White

Next

Sound system - Devices



20580
Supply unit,
32 Vdc 100 mA
output,
110-230 V~
50/60 Hz.
Depth: 40 mm



20582
Audio input with 2 RCA
connectors, automatic
volume adjustment,
incorporated line
terminator - 2 modules.
Depth: 37 mm



20580.B
Supply unit,
32 Vdc 100 mA
output,
110-230 V~
50/60 Hz.
Depth: 40 mm



20582.B
Audio input with 2 RCA
connectors, automatic
volume adjustment,
incorporated line
terminator - 2 modules.
Depth: 37 mm



20580.N
Supply unit,
32 Vdc 100 mA
output,
110-230 V~
50/60 Hz.
Depth: 40 mm



20582.N
Audio input with 2 RCA
connectors, automatic
volume adjustment,
incorporated line
terminator - 2 modules.
Depth: 37 mm



20583
Spring
connector for
speaker.
Depth: 19,4 mm



20584.1
Interface for By-me
devices and IR receiver,
with 3 m of cable.
Depth: 41 mm

Δ 20584
As above



20583.B
Spring
connector for
speaker.
Depth: 19,4 mm



20584.1.B
Interface for By-me
devices and IR receiver,
with 3 m of cable.
Depth: 41 mm

Δ 20584.B
As above



20583.N
Spring
connector for
speaker.
Depth: 19,4 mm



20584.1.N
Interface for By-me
devices and IR receiver,
with 3 m of cable.
Depth: 41 mm

Δ 20584.N
As above



20585
Docking station for iPod/iPhone device
and supply unit - 2 + 2 modules.
Depth: 37 mm



20585.B
Docking station for iPod/iPhone device
and supply unit - 2 + 2 modules.
Depth: 37 mm



20585.N
Docking station for iPod/iPhone device
and supply unit - 2 + 2 modules.
Depth: 37 mm



20586
Microphone for selective or general call,
voice activation function for monitoring
children - 2 modules. Depth: 37 mm



20586.B
Microphone for selective or general call,
voice activation function for monitoring
children - 2 modules. Depth: 37 mm



20586.N
Microphone for selective or general call,
voice activation function for monitoring
children - 2 modules. Depth: 37 mm



20581
2 rocker push buttons and 8 Ω 1+1 W
amplifier, integrated line terminator,
to complete with interchangeable
buttons - 2 modules. Depth: 37 mm

Sound system - 1-module interchangeable buttons



20531.23
Function/track
change symbols,
for rocker push
buttons



20531.24
O I and volume
adjustment symbols,
for rocker push
buttons



20531.23.B
Function/track
change symbols,
for rocker push
buttons



20531.24.B
O I and volume
adjustment symbols,
for rocker push
buttons



20531.23.N
Function/track
change symbols,
for rocker push
buttons



20531.24.N
O I and volume
adjustment symbols,
for rocker push
buttons

By-me: home automation system

[Grey](#)
[White](#)
[Next](#)

Sound system - Retrofit devices



01903
Branch shunt for By-me devices, flush mounting (retrofit)



01904
Branch shunt for sound system devices, flush mounting (retrofit)

Sound system - Speakers



21588
Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame.
Depth: 48 mm




21588.B
Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame.
Depth: 48 mm



21588.N
Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame.
Depth: 48 mm



20587
Passive speaker, 8 Ω 3 W
- 3 modules.
Depth: 40 mm



20587.B
Passive speaker, 8 Ω 3 W
- 3 modules.
Depth: 40 mm



20587.N
Passive speaker, 8 Ω 3 W
- 3 modules.
Depth: 40 mm



01906
IP55 passive speaker, 8 Ω 30 W,
for hollow walls and false ceiling
installation



01907
Passive speaker, 8 Ω 30 W,
for hollow walls and false
ceiling installation



01908
Passive speaker, 8 Ω
30 W, orientable, for
surface mounting

Sound system - Devices for DIN rail (60715 TH35) installation



01900
FM radio tuner with
RDS, coaxial con-
nector for external
FM antenna, built-in
line terminator



01901
Stereo amplifier, 2 outputs
for sound diffusers 8 Ω
10+10 W, power supply
110-230 V~ 50/60 Hz,
built-in line terminator



01902
Bus line/sound diffusion
decoupler for By-me
power supply, built-in
line terminator

By-me: home automation system

Grey

White

Next

Bus burglar alarm system - Control



21509
For control and configuration, touch display, temperature sensor input, for DIN rail (60715 TH35) or mounting installation - 3 modules. Depth: 37 mm



20480°
Control and configuration unit - 2 modules. Depth: 26,5 mm



21509.B
For control and configuration, touch display, temperature sensor input, for DIN rail (60715 TH35) or mounting installation - 3 modules. Depth: 37 mm



20480.B°
Control and configuration unit - 2 modules. Depth: 26,5 mm



21509.N
For control and configuration, touch display, temperature sensor input, for DIN rail (60715 TH35) or mounting installation - 3 modules. Depth: 37 mm



20480.N°
Control and configuration unit - 2 modules. Depth: 26,5 mm



20483
Digital keypad - 2 modules. Depth: 26,5 mm



20482
Activator/partialiser - 2 modules. Depth: 26,5 mm



20483.B
Digital keypad - 2 modules. Depth: 26,5 mm



20482.B
Activator/partialiser - 2 modules. Depth: 26,5 mm



20483.N
Digital keypad - 2 modules. Depth: 26,5 mm



20482.N
Activator/partialiser - 2 modules. Depth: 26,5 mm



01815
Transponder key



01816
Transponder card
01816.H
As above, customizable

Bus burglar alarm system - Devices



20490.1
Contact interface with two independent inputs which can be configured in different zones - 2 modules. Depth: 26,5 mm



20491
Contacts interface with configurable input, 12 Vdc 10 mA output - 2 modules. Depth: 26,5 mm



20490.1.B
Contact interface with two independent inputs which can be configured in different zones - 2 modules. Depth: 26,5 mm



20491.B
Contacts interface with configurable input, 12 Vdc 10 mA output - 2 modules. Depth: 26,5 mm



20490.1.N
Contact interface with two independent inputs which can be configured in different zones - 2 modules. Depth: 26,5 mm



20491.N
Contacts interface with configurable input, 12 Vdc 10 mA output - 2 modules. Depth: 26,5 mm



20486
Oriental IR presence detector - 2 modules. Depth: 26,5 mm



20493
Interface Bus-RF, two-way dual band, - 2 modules. Depth: 26,5 mm



20486.B
Oriental IR presence detector - 2 modules. Depth: 26,5 mm



20493.B
Interface Bus-RF, two-way dual band, - 2 modules. Depth: 26,5 mm



20486.N
Oriental IR presence detector - 2 modules. Depth: 26,5 mm



20493.N
Interface Bus-RF, two-way dual band, - 2 modules. Depth: 26,5 mm



20485
IR presence detector - 2 modules. Depth: 26,5 mm



20487
IR and microwaves presence detector - 2 modules. Depth: 26,5 mm



20485.B
IR presence detector - 2 modules. Depth: 26,5 mm



20487.B
IR and microwaves presence detector - 2 modules. Depth: 26,5 mm



20485.N
IR presence detector - 2 modules. Depth: 26,5 mm



20487.N
IR and microwaves presence detector - 2 modules. Depth: 26,5 mm

By-me: home automation system

[Grey](#)
[White](#)
[Next](#)

Bus burglar alarm system - Devices



00802.14
Orientable support - 2 modules.



00805.14
Adaptor for orientable support flush mounting - 2 modules.
Depth: 36,5 mm



00802
Orientable support - 2 modules



00805
Adaptor for orientable support flush mounting - 2 modules.
Depth: 36,5 mm



00802.20
Orientable support - 2 modules



00805.20
Adaptor for orientable support flush mounting - 2 modules.
Depth: 36,5 mm



00800.14
Frame for orientable support surface mounting



00800
Frame for orientable support surface mounting



00800.20
Frame for orientable support surface mounting



16897.S
Antitamper kit for orientable supports



20489
Actuator, 1 A 30 V change-over relay output - 2 modules.
Depth: 26,5 mm



20495
Self-powered indoor siren - 3 modules.
Depth: 27 mm



20489.B
Actuator, 1 A 30 V change-over relay output - 2 modules.
Depth: 26,5 mm



20495.B
Self-powered indoor siren - 3 modules.
Depth: 27 mm



20489.N
Actuator, 1 A 30 V change-over relay output - 2 modules.
Depth: 26,5 mm



20495.N
Self-powered indoor siren - 3 modules.
Depth: 27 mm

Bus burglar alarm system - Back-up unit



01804.14
Back-up unit, with inner siren
01803.14
Auxiliary battery holder unit for 01804...
Depth: 61 mm



01804.01
Back-up unit, with inner siren
01803.01
Auxiliary battery holder unit for 01804...
Depth: 61 mm



01804.N
Back-up unit, with inner siren
01803.N
Auxiliary battery holder unit for 01804...
Depth: 61 mm



16895
Flush mounting box for 01803..., 01804...



16895.C
Cover for 16895, white
16895.A
As above, antimortar, plasticized

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

By-me: home automation system

Bus burglar alarm system - For surface mounting



01806
Outdoor siren



01828
Mini IR presence detector,
for surface mounting



01829.1
Surface dual-technology
infrared presence detector

Bus burglar alarm system - Detectors and contacts



01820
Flush mounting
magnetic contact



01821
Metal flush mounting
magnetic contact



01822
Visible surface
magnetic contact



01823
Metal magnetic
contact



01825
Electromechanical cord-
operated contact for roll-
ing shutters protection



01826
Electromechanical inertial
contact for windows and
doors protection



01832.056
Active IR multi-beam protection rail,
NC 50 V relay output, 56 cm long

01832.076
As above, 76 cm long

01832.112
As above, 112 cm long

01832.152
As above, 152 cm long

01832.200
As above, 200 cm long

Radiofrequency burglar alarm system - Devices



01819
Two-way
remote control



01737
Supervised
IR detector,
dual-band



01738
Supervised detector with
magnetic contact for windows
and doors protection, dual-band



01744
Supervised water detector for
protection against flooding,
dual-band



01747
Supervised two-way
outdoor siren,
dual-band



00912
9 V 12 Ah spare part
battery for
outdoor siren

Burglar alarm system - Devices for DIN rail (60715 TH35) installation



01800
Supply unit, 29 Vdc 320
mA output,
120-230 V~ 50/60 Hz



01830
Supply unit 12 Vdc
output, 120-230 V~
50/60 Hz



01807
Back-up unit with decou-
pling, BUS+AUX 600 mA
output, 29 Vdc



01809
Battery holder for
consumer unit

By-me: home automation system

[Grey](#)
[White](#)
[Next](#)

Safety and security - Emergency lighting devices



02661
With high-efficiency LED, 230 V~ 50/60 Hz, rechargeable Ni-Cd battery and built-in 6/7-module frame. Depth: 44,7 mm



01846
Emergency lighting management interface through Bus By-me



00913
Ni-Cd 4,8 V 800 mAh spare rechargeable battery for 02661

Access control system - Devices



20470
Transponder card and key reader - 2 modules.
Depth: 26,5 mm



20470.B
Transponder card and key reader - 2 modules.
Depth: 26,5 mm



20470.N
Transponder card and key reader - 2 modules.
Depth: 26,5 mm



20471
Smart card reader and programmer - 3 modules.
Depth: 37 mm



20471.B
Smart card reader and programmer - 3 modules.
Depth: 37 mm



20471.N
Smart card reader and programmer - 3 modules.
Depth: 37 mm



20472
Actuator with 3 A
30 V change-over relay output - 2 modules.
Depth: 26,5 mm



20472.B
Actuator with 3 A
30 V change-over relay output - 2 modules.
Depth: 26,5 mm



20472.N
Actuator with 3 A
30 V change-over relay output - 2 modules.
Depth: 26,5 mm



20473
Smart card programmer in table mounting box - 4 modules



20473.B
Smart card programmer in table mounting box - 4 modules



20473.N
Smart card programmer in table mounting box - 4 modules

By-me: home automation system

Grey

White

Next

Access control system - Accessories



01816
Transponder card
01816.H
As above, customizable



01815
Transponder key



16452
Programmable smart card
16452.H
As above, customizable

Access control system - Devices for DIN rail (60715 TH35) installation



01400
Supply unit, 29 Vdc
400 mA output,
230 V~ 50/60 Hz



△ 01800
Supply unit, 29 Vdc 320 mA
output, 120-230 V~ 50/60 Hz



△ 01842
Decoupling coil

Accessories and cables



01839
Removable 2 screw
terminals, for Bus
system



01840
Bus system cable, halogen-free 2x0,50 mm², rated operating voltage to earth 400 V, suitable for I category cables, white - 100 m



01840.B
Cable for sound system,
halogen-free 2x0,50 mm²,
rated operating voltage to earth 400 V, suitable for I category
cables, blue - 100 m



01840.Y
Bus buglar alarm system cable,
halogen-free 2x0,50 mm²,
rated operating voltage to earth 400 V, suitable for I category
cables, yellow - 100 m



01841
Bus system cable,
halogen-free. 2x0,50 mm²
- 100 m

Software and interfaces



△ 01993
Hardware interface for By-me and
Well-contact Plus touch screens
+ By-me system programming by Bus
with RJ11 socket. It is necessary
EasyTool Professional and touch screen
configuration software



△ 01997.2
Software to interface By-me system
and Windows Media Center® for
Windows Vista and 7 (32 bit)



△ 01996
Interface for Due Fili Plus
video door entry system
connection, from special
RJ11 jack to PC with
Windows Media Center®

By-me: home automation system • Stand-alone systems

Grey	White	Next			
Special Bus RJ11 jack					
 20329 Special jack for Bus, screw terminals. Depth: 33,6 mm	 20329.B Special jack for Bus, screw terminals. Depth: 33,6 mm	 20329.N Special jack for Bus, screw terminals. Depth: 33,6 mm			
Stand-alone access control system					
 20461 Smart card reader/programmer, 12-24 V~ 50/60 Hz/ 12-24 Vdc (SELV) - 3 modules. Depth: 37 mm	 20465 Electronic switch, vertical pocket, 230 V~ 50/60 Hz/ 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm	 20461.B Smart card reader/programmer, 12-24 V~ 50/60 Hz/ 12-24 Vdc (SELV) - 3 modules. Depth: 37 mm	 20465.B Electronic switch, vertical pocket, 230 V~ 50/60 Hz/ 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm	 20461.N Smart card reader/programmer, 12-24 V~ 50/60 Hz/ 12-24 Vdc (SELV) - 3 modules. Depth: 37 mm	 20465.N Electronic switch, vertical pocket, 230 V~ 50/60 Hz/ 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm
 16474 Smart card for serial connection of reader/ programmer	 16452 Programmable smart card 16452.H As above, customizable	 16452.S ISO-card (badge)			
Stand-alone radio devices - With EnOcean module					
 20505 2 flat rocker buttons with EnOcean wireless connection, no battery, to complete with 20506 - 2 modules. Depth: 3,5 mm	 01796 Actuator with EnOcean module, relay output, supply voltage 230 V~ 50 Hz	 21507 Frame for surface mounting of 20505, only for Eikon Evo cover plate, grey	 21507.B Frame for surface mounting of 20505, only for Eikon Evo cover plate, white		
 20507 Frame for surface mounting of 20505, grey	 20507.B Frame for surface mounting of 20505, white	 20506 Pair of buttons for 20505 device, customizable	 20506.N Pair of buttons for 20505 device, customizable		
 20506 Pair of buttons for 20505 device, customizable	 20506.B Pair of buttons for 20505 device, customizable	 20506.N Pair of buttons for 20505 device, customizable			

Accessories

LED signalling units



00935.A: 12-24 V~ 0,1 W, amber
00935.G: 12-24 V~ 0,1 W, green
00935.R: 12-24 V~ 0,1 W, red
00935.B: 12-24 V~ 0,1 W, blue
00935.W: 12-24 V~ 0,1 W, white

00936.A: 110-250 V~ 0,5 W, amber
00936.G: 110-250 V~ 0,5 W, green
00936.R: 110-250 V~ 0,5 W, red
00936.B: 110-250 V~ 0,5 W, blue
00936.W: 110-250 V~ 0,5 W, white

LED signalling units for axial switches



00937.A: 12-24 V~ 0,1 W, amber
00937.G: 12-24 V~ 0,1 W, green
00937.R: 12-24 V~ 0,1 W, red
00937.B: 12-24 V~ 0,1 W, blue
00937.W: 12-24 V~ 0,1 W, white

00938.A: 110-250 V~ 0,3 W, amber
00938.G: 110-250 V~ 0,3 W, green
00938.R: 110-250 V~ 0,3 W, red
00938.B: 110-250 V~ 0,3 W, blue
00938.W: 110-250 V~ 0,3 W, white

Pre-wired signalling units



00930
250 V~ 0,3 W, red
suitable for British
standard socket outlets



00931
110-250 V~ 0,5 W,
amber

E10 10x28 mm lamps



Neon:
14778
110 V~ 0,5 W, red¹
14779
230 V~ 0,5 W, red¹



Incandescent:
14770
12 V~ 3 W, white¹
14771
24 V~ 3 W, white¹
14774
12 V~ 0,6 W, white¹

14775
24 V~ 1,2 W, white¹
14776
130 V~ 2,6 W, white¹
14777
230 V~ 3 W, white¹

Transparent cover for mounting frames



21602.C
For 2-module frame,
71 mm fixing centres



21613.C
For 3-module frame



21614.C
For 4-module frame



21618.C
For 8 (4+4)-module frame



21617.C
For 7-module frame

Adaptors for DIN rail (60715 TH35) installation



V51921
1-module support



V51922
2-module support



V51923
3-module support

Well-contact Plus: building automation

[Grey](#)
[White](#)
[Next](#)

Supervising - Control



■ 21553.1
10'' IP multimedia video touch screen for
Due Fili Plus video door system and By-me
system supervising by web server



■ 21848
Color touch screen, 4,3'', Full Flat, for the control,
1 temperature sensor input, with built-in mounting
frame for installation in 8-module mounting box.
Depth: 50,4 mm



■ 21848.B
Color touch screen, 4,3'', Full Flat, for the control,
1 temperature sensor input, with built-in mounting
frame for installation in 8-module mounting box.
Depth: 50,4 mm



■ 21848.BN
Color touch screen, 4,3'', Full Flat, for the control,
1 temperature sensor input, with built-in mounting
frame for installation in 8-module mounting box.
Depth: 50,4 mm



△ 20848.1
Color touch screen, 4,3'', for the control, 1 temperature
sensor input, with built-in mounting frame for installation
in 8-module mounting box. Depth: 39,9 mm



△ 20848.1.B
Color touch screen, 4,3'', for the control, 1 temperature
sensor input, with built-in mounting frame for installation
in 8-module mounting box. Depth: 39,9 mm



△ 20848.1.N
Color touch screen, 4,3'', for the control, 1 temperature
sensor input, with built-in mounting frame for installation
in 8-module mounting box. Depth: 39,9 mm



■ 21849.1
Full Flat touch screen,
for the room control,
1 temperature sensor input
- 3 modules.
Depth: 37 mm

△ 21849
As above



■ 21849.1.B
Full Flat touch screen,
for the room control,
1 temperature sensor input
- 3 modules.
Depth: 37 mm



■ 21849.1.BN
Full Flat touch screen,
for the room control,
1 temperature sensor input
- 3 modules.
Depth: 37 mm

△ 21849.BN
As above



△ 20849
Monochrome touch screen,
for the room control
- 3 modules.
Depth: 37 mm



△ 20849.B
Monochrome touch screen,
for the room control
- 3 modules.
Depth: 37 mm



△ 20849.N
Monochrome touch screen,
for the room control
- 3 modules.
Depth: 37 mm

Well-contact Plus: building automation

Grey

White

Next

Supervising - Devices for DIN rail (60715 TH35) installation



■ 01545
Web server for local and remote control of the KNX system


Automation - Control device



■ 20840
Control device with four independent push buttons, KNX standard, visible in darkness, to be completed with half-buttons - 2 modules. Depth: 20 mm



■ 21840
4 independently programmable buttons for single controls or scenes, KNX standard, for Eikon tactil - 2 modules. Depth: 38 mm



■ 21860
6 independently programmable buttons for single controls or scenes, KNX standard, for Eikon tactil - 3 modules. Depth: 38 mm

Automation - 1-module interchangeable half-buttons



■ 20841
Four half-buttons without symbol



■ 20841.0
Four half-buttons, O symbol



■ 20841.1
Four half-buttons, I symbol



■ 20841.B
Four half-buttons without symbol



■ 20841.0.B
Four half-buttons, O symbol



■ 20841.1.B
Four half-buttons, I symbol



■ 20841.N
Four half-buttons without symbol



■ 20841.0.N
Four half-buttons, O symbol



■ 20841.1.N
Four half-buttons, I symbol



■ 20841.2
Four half-buttons, I O symbol



■ 20841.3
Four half-buttons, directional arrows symbol



■ 20841.4
Four half-buttons, regulation symbol



■ 20841.2.B
Four half-buttons, I O symbol



■ 20841.3.B
Four half-buttons, directional arrows symbol



■ 20841.4.B
Four half-buttons, regulation symbol



■ 20841.2.N
Four half-buttons, I O symbol



■ 20841.3.N
Four half-buttons, directional arrows symbol



■ 20841.4.N
Four half-buttons, regulation symbol



■ 20843
Four fixed half-buttons, without symbol




■ 20843.B
Four fixed half-buttons, without symbol



■ 20843.N
Four fixed half-buttons, without symbol

Well-contact Plus: building automation

Grey	White	Next
Automation - 2-module interchangeable half-buttons		
 ■ 20842 Two half-buttons without symbol	 ■ 20842.0 Two half-buttons, O symbol	 ■ 20842.1 Two half-buttons, I symbol
 ■ 20842.2 Two half-buttons, I O symbol	 ■ 20842.3 Two half-buttons, directional arrows symbol	 ■ 20842.4 Two half-buttons, regulation symbol
 ■ 20844 Two fixed half-buttons, without symbol	 ■ 20844.B Two fixed half-buttons, without symbol	 ■ 20844.N Two fixed half-buttons, without symbol
Automation - Control		
 ■ 20850 Passive infrared presence detector, KNX standard - 2 modules. Depth: 26,5 mm	 00802.14 Oriental support - 2 modules	 00802.20 Oriental support - 2 modules
 00805.14 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm	 00805 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm	 00805.20 Adaptor for orientable support surface mounting - 2 modules. Depth: 36,5 mm
* Not to be used in European Countries ▲ New article △ Available until stocks last		


Well-contact Plus: building automation

Grey

White

Next

Access control - Eikon Tactil

**■ 21457**

Eikon Tactil touch transponder card reader, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 36,5 mm

**■ 21666.70**

Electronic plate for 21457, white diamond - 3 modules

**■ 21666.71**

Electronic plate for 21457, aqua - 3 modules

**■ 21666.73**

Electronic plate for 21457, pearl grey - 3 modules

**■ 21666.76**

Electronic plate for 21457, black diamond - 3 modules

Access control - Device

**■ 20457**

Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 37 mm

**■ 20453**

Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, supplementary power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 37 mm

**■ 20457.B**

Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 37 mm

**■ 20453.B**

Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, supplementary power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 37 mm

**■ 20457.N**

Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 37 mm

**■ 20453.N**

Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, supplementary power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 37 mm

**■ 20450**

Transponder card reader/programmer, in 4-module table mounting box. To complete with 4-module cover plate

**■ 20450.B**

Transponder card reader/programmer, in 4-module table mounting box. To complete with 4-module cover plate

**■ 20450.N**

Transponder card reader/programmer, in 4-module table mounting box. To complete with 4-module cover plate

**■ 01598**

Programmable and customizable transponder card

Well-contact Plus: building automation

[Grey](#)
[White](#)
[Next](#)

Temperature control (heating and air-conditioning)


■ 02952

Touch screen thermostat for ambient temperature control of 2 independent zones, KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor (20432 or 02965) input + 1 programmable digital input, grey - 2 modules. Depth: 37 mm


■ 02952.B

Touch screen thermostat for ambient temperature control of 2 independent zones, KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor (20432 or 02965) input + 1 programmable digital input, white - 2 modules. Depth: 37 mm


△ 20430

Ambient temperature control thermostat for 2 independent zones, KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor (20432) input + 1 programmable input - 2 modules. Depth: 37 mm


△ 20430.B

Ambient temperature control thermostat for 2 independent zones, KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor (20432) input + 1 programmable input - 2 modules. Depth: 37 mm


△ 20430.N

Ambient temperature control thermostat for 2 independent zones, KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor (20432) input + 1 programmable input - 2 modules. Depth: 37 mm


■ 20432

Electronic temperature sensor. Depth: 24,4 mm


■ 20432.B

Electronic temperature sensor. Depth: 24,4 mm


■ 20432.N

Electronic temperature sensor. Depth: 24,4 mm


■ 02965

Linear temperature sensor, cable length 4 m

Temperature control - Weather station


■ 01546

Weather station, KNX standard, power supply 12-32 Vdc or 12-24 Vac

Brightness and presence sensors


■ 01529

IR presence detector, 360° motion range, for lightings depending on the brightness, 0-100 Lux adjustable brightness range, KNX standard, for ceiling installation


■ 01529.S

Adapter for 01529 detector ceiling installation


■ 01530

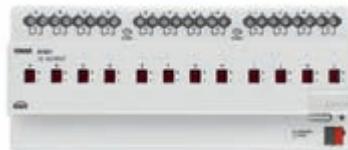
Light sensor for dimmer 01528, KNX standard, ceiling installation

Well-contact Plus: building automation

Devices for DIN rail (60715 TH35) installation



■ 01510
4-channel digital input device, programmable for NO, NC and 120-230 V~ contacts, KNX standard



■ 01521
Actuator with 12 10 A 250 V~ 50/60 Hz relay outputs for fluorescent lamps, KNX standard



■ 01523
Actuator with 4 NO 16 A 250 V~ relay outputs, KNX standard



■ 01522
Input/output device, 4 NO 16 A 250 V~ relay outputs, 4 inputs for NO contacts, KNX standard



■ 01524
Actuator for 2 roller shutters, 16 A 250 V~ relay outputs, KNX standard



■ 01525
Actuator for 8 roller shutters, 6 A 230V~ 50/60 Hz relay outputs, KNX standard



■ 01528
Dimmer, 2 inputs for 01530, 2 NO 16 A 250 V~ relay outputs, 2 1-10 V outputs, KNX standard



■ 01526
Dimmer 230 V~ 50/60 Hz for 2x300 W incandescent lamps, 2x300 VA ferromagnetic transformers, 2x300 VA electronic transformers, KNX standard



■ 01544
KNX DALI gateway, 8-channel for 16 lamps per channel



■ 16887
Safety transformer, 230/12-24 V~ (SELV), 24 VA



■ 01500
Power supply with Bus 30 Vdc 320 mA output, supply voltage 230 V~ 50/60 Hz, with decoupling coil, KNX standard



■ 01501.1
Power supply with Bus 30 Vdc 640 mA output, 30 Vdc auxiliary output, supply voltage 230 V~ 50/60 Hz, with decoupling coil, KNX standard



■ 01504.1
Line coupler, KNX standard



■ 01504
Line coupler, KNX standard



■ 01547
IP interface, KNX



■ 01540
USB interface, KNX B-type



■ 01515
Interface with 4 input or output programmable channels for LEDs, KNX standard

KNX cable



■ 01890
2x2x0,8 mm cable, KNX standard

Software and interface



Software for Well-contact Plus system management.

- 01589:** Well-contact Suite Light
- 01590:** Well-contact Suite Basic
- 01591:** Well-contact Suite Top
- 01592:** Well-contact Suite Client
- 01593:** Well-contact Suite Office
- 01594:** Well-contact Suite Client Office




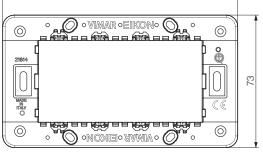
- 01595**
Additional software for interfacing with existing management system

- 01597**
USB spare key for Well-contact Suite software



■ 01993
Hardware interface for By-me and Well-contact Plus touch screens + By-me system programming by Bus with RJ11 socket. It is necessary EasyTool Professional and touch screen configuration software

Eikon Tactil: standard types of mounting

Module	Box	Frame
2 for ø 60 mm or 56x56 mm mounting box	<p>Flush mounting</p>   <p>V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black</p> <p>V71701 For hollow walls, for frame without claws, GW 850 °C, light blue</p>	 <p>21602 2-module, with claws</p>  <p>21603 2-module, without screws</p>  
3	<p>Flush mounting</p>   <p>V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black</p> <p>V71703 For hollow walls GW 850 °C, light blue</p>	 <p>21613 3-module, with screws</p> 
4	<p>Flush mounting</p>   <p>V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black</p> <p>V71704 For hollow walls GW 850 °C, light blue</p>	 <p>21614 4-module, with screws</p> 

Eikon Tactil: standard types of mounting

Cover plate	Material and finishing availability*
 <p>21662... 2-module Dimensions: 95,4x95,4 mm</p>	<p>Luminosi</p> <p>.70 White diamond .71 Aqua .73 Pearl grey .76 Black Diamond</p>
 <p>21663... 3-module Dimensions: 118x106 mm</p>	<p>Luminosi</p> <p>.70 White diamond .71 Aqua .73 Pearl grey .76 Black Diamond</p>
 <p>21664... 4-module Dimensions: 140,5x106 mm</p>	<p>Luminosi</p> <p>.70 White diamond .71 Aqua .73 Pearl grey .76 Black Diamond</p>

Eikon Tactil: customization

Eikon Tactil devices customization

Information

- the electronic devices have been customized with a Mylar label application (21847), in the pre-set area;
- the labels include the most common symbols used in an electrical or automation system;
- the symbol is backlit, in amber if the device is installed in a conventional electrical system or with RGB colours if installed and programmed in a By-me or Well-contact Plus systems.



Device customized with labels



Mylar labels

Available symbols in Mylar labels 21847 (Some symbols are repeated several times)



Repetition 10 1 1 1 1 5 5 1 2 1 1 8



Repetition 3 2 4 5 2 4 1 1 1 3 3 2



Repetition 1 1 1 1 1 1 3 3 1 1 1 2



Repetition 1 1 1 1 1 1 1 1 1 2 2 1



Repetition 1 1 2 2 2 2 2 2 2 2 2 1



Repetition 1 1 1 1 1 1 2 2 2 1 2 2



Repetition 3 3 3 2 3 2 2 2 2 2 2 2



Repetition 2 2 1 1 2 1 1 1 1 1 1 1



Repetition 1 1 2 1 1 1 1 1 1 1 1 1

Luminosi

(Bevelled crystal)



70 White diamond



71 Aqua


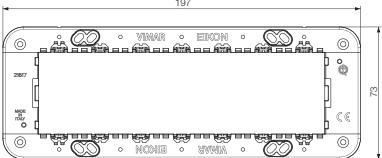


73 Pearl grey



76 Black Diamond

Eikon Evo: standard types of mounting

Module	Box	Frame
2 for Ø 60 mm or 56x56 mm mounting box	<p>Flush mounting</p>   <p>V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black</p> <p>V71701 For hollow walls, for frame without claws, GW 850 °C, light blue</p>	 <p>21602 2-module, with claws</p>  <p>21603 2-module, without screws</p>  <p>21613 3-module, with screws</p>  <p>21614 4-module, with screws</p>
3	<p>Flush mounting</p>   <p>V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black</p> <p>V71703 For hollow walls GW 850 °C, light blue</p>	
4	<p>Flush mounting</p>   <p>V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black</p> <p>V71704 For hollow walls GW 850 °C, light blue</p>	
7	<p>Flush mounting</p>   <p>V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black</p> <p>V71706 For hollow walls GW 850 °C, light blue</p>	 <p>21617 7-module, with screws</p>  <p>21618 8-module, with screws</p>

Eikon Evo: standard types of mounting

Cover plate	Material and finishing availability*							
	Primari	Esclusivi	Scolpiti	Naturali	Luminosi	Speciali (Corian®)	Raffinati	Essenziali
 21642... 2-module Dimensions: 94,7x94,7 mm	●	●	●	●	●	●	●	●
 21653... 3-module Dimensions: 117,3x105,3 mm	●	●	●	●	●	●	●	●
 21654... 4-module Dimensions: 139,8x105,3 mm	●	●	●	●	●	●	●	●
 21657... 7-module Dimensions: 207,3x105,3 mm	●	●	●	●	●	●	●	●

* Cover plates range, page 98

Eikon Evo: standard types of mounting

Module	Box	Touch screen
8 (4+4)	<p>Flush mounting</p>  <p>V71318 For masonry GW 650 °C, light blue</p> <p>V71718 For hollow walls GW 850 °C, light blue</p>	 <p>21554 4,3" Full Flat video touch screen, grey 21554.B: white 21554.BN: neutral</p>  <p>21511... 4,3" touch screen Full Flat, with built-in 8-module mounting frame △ 20511.1... As above 21848... Touch screen a colori, 4,3" Full Flat Well-contact Plus, with built-in 8-module mounting frame △ 20848.1... As above</p>  <p>△ 21550... 3,5" LCD monitor, with built-in 8-module mounting frame △ 20550... As above</p>  <p>21618 4+4-module, with claws</p>
8 (4+4)	<p>Semi-flush mounting</p>  <p>V71318 For masonry GW 650 °C, light blue</p> <p>V71718 For hollow walls GW 850 °C, light blue</p>	 <p>21553.1 10" IP multimedia video touch screen</p>














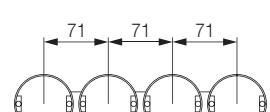

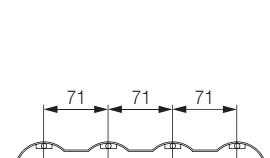

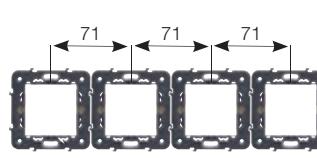
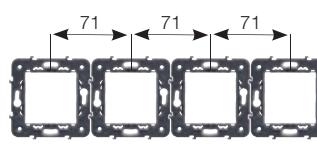


Δ Available until stocks last

Eikon Evo: standard types of mounting

Cover plate	Material and finishing availability*							
	Primari	Esclusivi	Scolpiti	Naturali	Luminosi	Speciali (Corian®)	Raffinati	Essenziali
 21668... 8-module (4+4) Dimensions: 154,7x154,7 mm	●	●	●	●	●	●	●	●
 Cover plate rotated at a 90° angle	●	●	●	●	●	●	●	●
		Aluminium			Crystal			
 21665... For multimedia video touch screen Dimensions: 345x250 mm	.11 Aluminium			.70 White diamond .76 Black Diamond				

* Cover plates range, page 98






Eikon Evo: German standard mounting (71 mm between centres)

Module	Box	Frame
2 + 2 71 mm between centres	   	   
2 + 2 + 2 71 mm between centres	   	   
2 + 2 + 2 + 2 71 mm between centres	   	   

Eikon Evo: German standard mounting (71 mm between centres)

Cover plate	Material and finishing availability*							
	Primari	Esclusivi	Scolpiti	Naturali	Luminosi	Speciali (Corian®)	Raffinati	Essenziali
 21643... 4-module (2+2), for horizontal and vertical installation. Dimensions: 166,4x95,4 mm	●	●			●			●
 21644... 6-module (2+2+2), for horizontal and vertical installation. Dimensions: 237,4x95,4 mm	●	●			●			●
 21669... 8-module (2+2+2+2), for horizontal and vertical installation. Dimensions: 308,4x95,4 mm	●	●			●			●




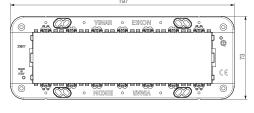
Eikon Evo: British standard mounting

Module	Box	Frame
1 and 2	<p>Flush mounting</p>  <p>1-gang mounting box Fixing centres: 60,3 mm</p>	   <p>20606¹ 1-module, with screws M 3,5, grey</p> <p>20606.B¹ 1-module, with screws M 3,5, white</p> <p>20606.N¹ 1-module, with screws M 3,5, Next</p>   <p>20607¹ 2-module, with screws M 3,5</p>
Monobloc	<p>Flush mounting</p>  <p>1-gang mounting box Fixing centres: 60,3 mm</p>	  <p>20215.L Example of monobloc device</p> <p>20017.L Example of monobloc device</p>
5 and Monobloc	<p>Flush mounting</p>  <p>2-gang mounting box Fixing centres: 120,6 mm</p>	  <p>20609¹ 5-module, with screws M 3,5</p>   <p>20222.L Example of monobloc device in horizontal mounting</p>   <p>20291 Example of monobloc device in vertical mounting</p>

Eikon Evo: British standard mounting


Cover plate	Material and finishing availability*							
	Primari	Esclusivi	Scolpiti	Naturali	Luminosi	Speciali (Corian®)	Raffinati	Essenziali
 21642... 2-module Dimensions: 94,7x94,7 mm	●	●	●	●	●	●	●	●
 21648... 3-module Dimensions: 94,7x94,7 mm	●	●	●	●	●	●	●	●
 21649... 5-module Dimensions: 162,3x94,7 mm	●	●	●	●	●	●	●	●

Eikon Chrome and Eikon Total Look: Italian standard mounting

Module	Box	Frame		
2 for ø 60 mm mounting box	<p>Flush mounting</p>  V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black  V71701 For hollow walls, for frame without claws, GW 850 °C, light blue	<p>Surface mounting</p>  09971.A 43.5 deep, RAL 9001 ivory 09971.01: white △ 09971.SL: Silver	 21602 2-module, with claws	 21603 2-module, without screws
2-central and 3	<p>Flush mounting</p>  V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black  V71703 For hollow walls GW 850 °C, light blue	<p>Surface mounting</p>  09983 35-45 mm deep, grey 09983.01: white △ 09983.N: Next	 21612 2-central-module, with screws	 21613 3-module, with screws
4	<p>Flush mounting</p>  V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black	<p>Table mounting</p>  20784 4-module table mounting box, grey 20784.B As above, white 20784.N As above, Next	 21614 4-module, with screws	
7	<p>Flush mounting</p>  V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black	<p>Table mounting</p>  20787 7-module table mounting box, grey 20787.B As above, white 20787.N As above, Next	 21617 7-module, with screws	

Δ Available until stocks last

Eikon Chrome and Eikon Total Look: Italian standard mounting

Eikon Chrome cover plate: material and finishing availability*						Eikon Total Look cover plate: material and finishing availability*			
Classic	20642... 2-module Dimensions: 85x85 mm	Bright	Refined	Inox	Wood	Glass	Classic	20642... 2-module Dimensions: 85x85 mm	Bright
Round		20672... 2-module Dimensions: 80x80 mm	●	●	●	●		20672... 2-module Dimensions: 80x80 mm	.15 anthracite .B01 white .N13 silver
Classic		20652... 2-central-module Dimensions: 120x85 mm	●	●	●	●		20652... 2-central-module Dimensions: 120x85 mm	.15 anthracite .B01 white .N13 silver
Round		20682... 2-central-module Dimensions: 120x80 mm	●	●	●	●		20682... 2-central-module Dimensions: 120x80 mm	.15 anthracite .B01 white .N13 silver
Classic		20652... 2-central-module Dimensions: 120x85 mm	●	●	●	●		20652... 2-central-module Dimensions: 120x85 mm	.15 anthracite .B01 white .N13 silver
Round		20682... 2-central-module Dimensions: 120x80 mm	●	●	●	●		20682... 2-central-module Dimensions: 120x80 mm	.15 anthracite .B01 white .N13 silver
Classic		20653... 3-module Dimensions: 120x85 mm	●	●	●	●		20653... 3-module Dimensions: 120x85 mm	.15 anthracite .B01 white .N13 silver
Round		20683... 3-module Dimensions: 120x80 mm	●	●	●	●		20683... 3-module Dimensions: 120x80 mm	.15 anthracite .B01 white .N13 silver
Classic		20654... 4-module Dimensions: 142x85 mm	●	●	●	●		20654... 4-module Dimensions: 142x85 mm	.15 anthracite .B01 white .N13 silver
Round		20684... 4-module Dimensions: 142x80 mm	●	●	●	●		20684... 4-module Dimensions: 142x80 mm	.15 anthracite .B01 white .N13 silver
Classic		20657... 7-module Dimensions: 206x85 mm	●	●	●	●		20657... 7-module Dimensions: 206x85 mm	.15 anthracite .B01 white .N13 silver
Round		20687... 7-module Dimensions: 210x80 mm	●	●	●	●		20687... 7-module Dimensions: 210x80 mm	.15 anthracite .B01 white .N13 silver


* Cover plates range, from page 100 and 102

Eikon Chrome and Eikon Total Look: Italian standard mounting








Module	Box	Frame
8 (4+4)	<p>Flush mounting</p>  <p>V71318 For masonry GW 650 °C, light blue</p> <p>Table mounting</p>  <p>V71718 For hollow walls GW 850 °C, light blue</p> <p>20788 8-module with Classic and Round frame, grey 20788.B white 20788.N Next Dimensions: 141x151,9x135 mm</p>	 <p>21554 4,3" Full Flat video touch screen, grey 21554.B: white 21554.BN: neutral</p>  <p>21511... 4,3" touch screen Full Flat, with built-in 8-module mounting frame △ 20511.1... As above</p>  <p>21848... Touch screen a colori, 4,3" Full Flat Well-contact Plus, with built-in 8-module mounting frame △ 20848.1... As above</p>  <p>△ 21550... 3,5" LCD monitor, with built-in 8-module mounting frame △ 20550... As above</p>  <p>21618 4+4-module, with claws</p>
1	<p>Panel mounting</p>  <p>16776.AU GW 960 °C</p>	 <p>20626 1-module, with screws</p>
2	 <p>16776.AU x 2 GW 960 °C</p>	 <p>20627 2-module, with screws</p>
14 (7+7)	<p>Flush mounting</p>  <p>V71320 For masonry GW 650 °C, light blue</p> <p>Surface mounting</p>  <p>V71720 For hollow walls GW 850 °C, light blue</p> <p>09920.01, White △ 09920.14, Grey △ 09920.N, Next</p>	 <p>20620 14-module (7+7), with screws</p>
21 (7+7+7)	<p>Flush mounting</p>  <p>V71321 For masonry GW 650 °C, light blue</p> <p>Surface mounting</p>  <p>09921.01, White △ 09921.14, Grey △ 09921.N, Next</p>	 <p>20621 21-module (7+7+7), with screws</p>

Δ Available until stocks last

Eikon Chrome and Eikon Total Look: Italian standard mounting

Eikon Chrome cover plate: material and finishing availability*						Eikon Total Look cover plate: material and finishing availability*		
Classic	Bright	Refined	Inox	Wood	Glass	Classic	Bright	
 20668... 8-module Dimensions: 142x156 mm	●	●	●	●	●	 20668... 8-module Dimensions: 142x156 mm	.15 anthracite .B01 white .N13 silver	
Round  20698... 8-module Dimensions: 142x151 mm	●	●	●	●		Round  20698... 8-module Dimensions: 142x151 mm	.15 anthracite .B01 white .N13 silver	
						Classic  20666... 1-module Dimensions: 40x80 mm	Round  20696... 1-module Dimensions: 40x80 mm	Bright .15 anthracite .B01 white .N13 silver
						Classic  20667... 2-module Dimensions: 40x137 mm	Round  20697... 2-module Dimensions: 40x137 mm	.15 anthracite .B01 white .N13 silver
Classic  20660... 14-module (7+7), technopolymer, with signalling tags. Dimensions: 207x153 mm	Technopolymer .01 white .13 silver .15 anthracite							
Classic  20661... 21-module (7+7+7), technopolymer, with signalling tags. Dimensions: 207x223 mm	Technopolymer .01 white .13 silver .15 anthracite							

Eikon Chrome and Eikon Total Look: British standard mounting

Module	Box	Frame
1 and 2	<p>Flush mounting</p>  <p>1-gang mounting box Fixing centres: 60,3 mm</p>	   <p>20606¹ 1-module, with screws M 3,5, grey</p> <p>20606.B¹ 1-module, with screws M 3,5, white</p> <p>20606.N¹ 1-module, with screws M 3,5, Next</p>   <p>20607¹ 2-module, with screws M 3,5</p>
Monobloc	<p>Flush mounting</p>  <p>1-gang mounting box Fixing centres: 60,3 mm</p>	  <p>20215.L Example of monobloc device</p> <p>20017.L Example of monobloc device</p>
5 and Monobloc	<p>Flush mounting</p>  <p>2-gang mounting box Fixing centres: 120,6 mm</p>	  <p>20609¹ 5-module, with screws M 3,5</p>   <p>20222.L Example of monobloc device in horizontal mounting</p>   <p>20291 Example of monobloc device in vertical mounting</p>

¹ Items conform to BS 5733

Eikon Chrome and Eikon Total Look: British standard mounting

Eikon Chrome cover plate: material and finishing availability*						Eikon Total Look cover plate: material and finishing availability*
	Bright	Refined	Inox	Wood	Glass	
Classic  20647... 2-module Dimensions: 95x95x9 mm	●	●	●	●	●	Classic  20647... 2-module Dimensions: 95x95x9 mm
Round  20677... 2-module Dimensions: 95x95x9 mm	●	●	●	●		Round  20677... 2-module Dimensions: 95x95x9 mm
Classic  20648... Cover plate for horizontal and vertical installation. Dimensions: 95x95x9 mm Cover plate for monobloc device mounting, only.	●	●	●	●	●	Classic  20648... Cover plate for horizontal and vertical installation. Dimensions: 95x95x9 mm Cover plate for monobloc device mounting, only.
Round  20678... Cover plate for horizontal and vertical installation. Dimensions: 95x95x9 mm Cover plate for monobloc device mounting, only.	●	●	●	●		Round  20678... Cover plate for horizontal and vertical installation. Dimensions: 95x95x9 mm Cover plate for monobloc device mounting, only.
Classic  20649... 5-module For horizontal and vertical installation. Dimensions: 155x95x9 mm	●	●	●	●	●	Classic  20649... 5-module For horizontal and vertical installation. Dimensions: 155x95x9 mm
Round  20679... 5-module For horizontal and vertical installation. Dimensions: 155x95x9 mm	●	●	●	●		Round  20679... 5-module For horizontal and vertical installation. Dimensions: 155x95x9 mm

* Cover plates range, from page 105

Eikon Evo cover plates: guideline

	2-module	3-module	4-module	7-module
				
Primari (Anodized aluminium)				
Brilliant Aluminium	21642.01	21653.01	21654.01	21657.01
Next Grey	21642.02	21653.02	21654.02	21657.02
Lava Grey	21642.03	21653.03	21654.03	21657.03
Neutral Bronze	21642.04	21653.04	21654.04	21657.04
Dark Bronze	21642.05	21653.05	21654.05	21657.05
Esclusivi (Refined aluminium)				
Black Sapphire	21642.06	21653.06	21654.06	21657.06
Silver	21642.07	21653.07	21654.07	21657.07
Titanium	21642.08	21653.08	21654.08	21657.08
Polished gold	21642.09	21653.09	21654.09	21657.09
Satin gold	21642.10	21653.10	21654.10	21657.10
Scolpiti (Carved stone)				
Carrara white	21642.51	21653.51	21654.51	21657.51
Natural split slate	21642.52	21653.52	21654.52	21657.52
Grey quartzite	21642.53	21653.53	21654.53	21657.53
Naturali (Solid wood)				
Italian walnut	21642.31	21653.31	21654.31	21657.31
White Oak	21642.32	21653.32	21654.32	21657.32
Wengé	21642.33	21653.33	21654.33	21657.33
Luminosi (Bevelled crystal)				
White diamond	21642.70	21653.70	21654.70	21657.70
Aqua	21642.71	21653.71	21654.71	21657.71
Silver ice	21642.72	21653.72	21654.72	21657.72
Pearl grey	21642.73	21653.73	21654.73	21657.73
Opal brown	21642.74	21653.74	21654.74	21657.74
Bronze mirror	21642.75	21653.75	21654.75	21657.75
Black Diamond	21642.76	21653.76	21654.76	21657.76
Raffinati (Natural leather)				
Cream	21642.21	21653.21	21654.21	21657.21
Tobacco	21642.22	21653.22	21654.22	21657.22
Speciali (Corian®)				
Glacier ice	21642.41	21653.41	21654.41	21657.41
Essenziali (Total aluminium and crystal)				
Total White	21642.17	21653.17	21654.17	21657.17
Total Black	21642.18	21653.18	21654.18	21657.18
Total White Diamond	21642.87	21653.87	21654.87	21657.87
Total Black Diamond	21642.88	21653.88	21654.88	21657.88


Eikon Evo cover plates: guideline

8-module	2+2-module (between centres 71 mm)	2+2+2-module (between centres 71 mm)	2+2+2+2-module (between centres 71 mm)
			
21668.01	21643.01	21644.01	21669.01
21668.02	21643.02	21644.02	21669.02
21668.03	21643.03	21644.03	21669.03
21668.04	21643.04	21644.04	21669.04
21668.05	21643.05	21644.05	21669.05
21668.06	21643.06	21644.06	21669.06
21668.07	21643.07	21644.07	21669.07
21668.08	21643.08	21644.08	21669.08
21668.09	21643.09	21644.09	21669.09
21668.10	21643.10	21644.10	21669.10
21668.51	-	-	-
21668.52	-	-	-
21657.53	-	-	-
21668.31	-	-	-
21657.32	-	-	-
21668.33	-	-	-
21668.70	21643.70	21644.70	21669.70
21668.71	21643.71	21644.71	21669.71
21668.72	21643.72	21644.72	21669.72
21668.73	21643.73	21644.73	21669.73
21668.74	21643.74	21644.74	21669.74
21668.75	21643.75	21644.75	21669.75
21668.76	21643.76	21644.76	21669.76
21668.21	-	-	-
21668.22	-	-	-
21668.41	-	-	-
21668.17	21643.17	21644.17	21669.17
21668.18	21643.18	21644.18	21669.18
21668.87	21643.87	21644.87	21669.87
21668.88	21643.88	21644.88	21669.88

Eikon Chrome cover plates: guideline



	2-module	2-central-module	3-module		
					
	Classic	Round	Classic	Round	Classic
Bright (Varnished metal)					
 Artic white	20642.C01	20672.C01	20652.C01	20682.C01	20653.C01
 Antique white	20642.C02	20672.C02	20652.C02	20682.C02	20653.C02
 Metallic champagne	20642.C07	20672.C07	20652.C07	20682.C07	20653.C07
 Metallic titanium	20642.C08	20672.C08	20652.C08	20682.C08	20653.C08
 Metallic Atlantic grey	-	20672.C09	-	20682.C09	-
 Metallic silver	20642.C10	20672.C10	20652.C10	20682.C10	20653.C10
 Metallic Siena	20642.C11	-	20652.C11	-	20653.C11
 Metallic anthracite	20642.C12	20672.C12	20652.C12	20682.C12	20653.C12
 Matt silver	20642.C13	20672.C13	20652.C13	20682.C13	20653.C13
 Matt titanium	20642.C14	20672.C14	20652.C14	20682.C14	20653.C14
 Matt anthracite	20642.C15	20672.C15	20652.C15	20682.C15	20653.C15
Refined (Refined metal)					
 Satin gold (with gold frame)	20642.G21	20672.G21	20652.G21	20682.G21	20653.G21
 Satin nickel	20642.C22	20672.C22	20652.C22	20682.C22	20653.C22
 Satin chrome	-	20672.C23	-	20682.C23	-
 Polished gold (with gold frame)	20642.G24	20672.G24	20652.G24	20682.G24	20653.G24
Inox (Stainless steel)					
 Brushed inox	20642.C91	20672.C91	20652.C91	20682.C91	20653.C91
Wood (Solid wood)					
 African wengé	20642.C31	-	20652.C31	-	20653.C31
 White oak	20642.C32	20672.C32	20652.C32	20682.C32	20653.C32
 Italian walnut	20642.C35	20672.C35	20652.C35	20682.C35	20653.C35
 American cherrywood	-	20672.C36	-	20682.C36	-
Glass (Crystal)					
 Black ice	20642.C71	-	20652.C71	-	20653.C71
 White ice	20642.C72	-	20652.C72	-	20653.C72
 Silver mirror	20642.C81	-	20652.C81	-	20653.C81

Eikon Chrome cover plates: guideline

4-module		7-module		8-module	
					
Classic	Round	Classic	Round	Classic	Round
20654.C01	20684.C01	20657.C01	20687.C01	20668.C01	20698.C01
20654.C02	20684.C02	20657.C02	20687.C02	20668.C02	20698.C02
20654.C07	20684.C07	20657.C07	20687.C07	20668.C07	20698.C07
20654.C08	20684.C08	20657.C08	20687.C08	20668.C08	20698.C08
-	20684.C09	-	20687.C09	-	20698.C09
20654.C10	20684.C10	20657.C10	20687.C10	20668.C10	20698.C10
20654.C11	-	20657.C11	-	20668.C11	-
20654.C12	20684.C12	20657.C12	20687.C12	20668.C12	20698.C12
20654.C13	20684.C13	20657.C13	20687.C13	20668.C13	20698.C13
20654.C14	20684.C14	20657.C14	20687.C14	20668.C14	20698.C14
20654.C15	20684.C15	20657.C15	20687.C15	20668.C15	20698.C15
<hr/>					
20654.G21	20684.G21	20657.G21	20687.G21	20668.G21	20698.G21
20654.C22	20684.C22	20657.C22	20687.C22	20668.C22	20698.C22
-	20684.C23	-	20687.C23	-	20698.C23
20654.G24	20684.G24	20657.G24	20687.G24	20668.G24	20698.G24
<hr/>					
20654.C91	20684.C91	20657.C91	20687.C91	20668.C91	20698.C91
<hr/>					
20654.C31	-	20657.C31	-	20668.C31	-
20654.C32	20684.C32	20657.C32	20687.C32	20668.C32	20698.C32
20654.C35	20684.C35	20657.C35	20687.C35	20668.C35	20698.C35
-	20684.C36	-	20687.C36	-	20698.C36
<hr/>					
20654.C71	-	20657.C71	-	20668.C71	-
20654.C72	-	20657.C72	-	20668.C72	-
20654.C81	-	20657.C81	-	20668.C81	-

Eikon Total Look cover plates: guideline

	2-module		2-central-module		3-module		4-module	
								
	Classic	Round	Classic	Round	Classic	Round	Classic	Round
Bright (Varnished metal)								
Artic white	20642.B01	20672.B01	20652.B01	20682.B01	20653.B01	20683.B01	20654.B01	20684.B01
Matt silver	20642.N13	20672.N13	20652.N13	20682.N13	20653.N13	20683.N13	20654.N13	20684.N13
Matt anthracite	20642.15	20672.15	20652.15	20682.15	20653.15	20683.15	20654.15	20684.15
Reflex (Technopolymer)								
Reflex graphite	20642.40	-	20652.40	-	20653.40	-	20654.40	-
Reflex ice (with white frame)	20642.B41	-	20652.B41	-	20653.B41	-	20654.B41	-

	7-module		8-module		14-module		21-module	Panel mounting 1-module	Panel mounting 2-module	
										
	Classic	Round	Classic	Round	Classic	Classic	Classic	Classic	Round	
Bright (Varnished metal)										
Artic white	20657.B01	20687.B01	20668.B01	20698.B01	20660.01*	20661.01*	20666.B01	20696.B01	20667.B01	20697.B01
Matt silver	20657.N13	20687.N13	20668.N13	20698.N13	20660.13*	20661.13*	20666.N13	20696.N13	20667.N13	20697.N13
Matt anthracite	20657.15	20687.15	20668.15	20698.15	20660.15*	20661.15*	20666.15	20696.15	20667.15	20697.15
Reflex (Technopolymer)										
Reflex graphite	20657.40	-	20668.40	-	-	-	-	-	-	
Reflex ice (with white frame)	20657.B41	-	20668.B41	-	-	-	-	-	-	

* Technopolymer

Eikon Evo cover plates for British standard: guideline

	2-module	Monobloc	5-module/monobloc
			
Primari (Anodized aluminium)			
 Brilliant Aluminium	21642.01	21648.01	21649.01
 Next Grey	21642.02	21648.02	21649.02
 Lava Grey	21642.03	21648.03	21649.03
 Neutral Bronze	21642.04	21648.04	21649.04
 Dark Bronze	21642.05	21648.05	21649.05
Esclusivi (Refined aluminium)			
 Black Sapphire	21642.06	21648.06	21649.06
 Silver	21642.07	21648.07	21649.07
 Titanium	21642.08	21648.08	21649.08
 Polished gold	21642.09	21648.09	21649.09
 Satin gold	21642.10	21648.10	21649.10
Scolpiti (Carved stone)			
 Carrara white	21642.51	21648.51	21649.51
 Natural split slate	21642.52	21648.52	21649.52
 Grey quartzite	21642.53	21648.53	21649.53
Naturali (Solid wood)			
 Italian walnut	21642.31	21648.31	21649.31
 White Oak	21642.32	21648.32	21649.32
 Wengé	21642.33	21648.33	21649.33

Eikon Evo cover plates for British standard: guideline

	2-module	Monobloc	5-module/monobloc
			
Luminosi (Bevelled crystal)			
 White diamond	21642.70	21648.70	21649.70
 Aqua	21642.71	21648.71	21649.71
 Silver ice	21642.72	21648.72	21649.72
 Pearl grey	21642.73	21648.73	21649.73
 Opal brown	21642.74	21648.74	21649.74
 Bronze mirror	21642.75	21648.75	21649.75
 Black Diamond	21642.76	21648.76	21649.76
Raffinati (Natural leather)			
 Cream	21642.21	21648.21	21649.21
 Tobacco	21642.22	21648.22	21649.22
Speciali (Corian®)			
 Glacier ice	21642.41	21648.41	21649.41
Essenziali (total aluminium and crystal)			
 Total White	21642.17	21648.17	21649.17
 Total Black	21642.18	21648.18	21649.18
 Total White Diamond	21642.87	21648.87	21649.87
 Total Black Diamond	21642.88	21648.88	21649.88

Eikon Chrome cover plates for British standard: guideline

	2-module	Monobloc	5-module/monobloc			
						
	Classic	Round	Classic	Round	Classic	Round
Bright (Varnished metal)						
Artic white	20647.C01	20677.C01	20648.C01	20678.C01	20649.C01	20679.C01
Antique white	20647.C02	20677.C02	20648.C02	20678.C02	20649.C02	20679.C02
Metallic champagne	20647.C07	20677.C07	20648.C07	20678.C07	20649.C07	20679.C07
Metallic titanium	20647.C08	20677.C08	20648.C08	20678.C08	20649.C08	20679.C08
Metallic Atlantic grey	-	20677.C09	-	20678.C09	-	20679.C09
Metallic silver	20647.C10	20677.C10	20648.C10	20678.C10	20649.C10	20679.C10
Metallic Siena	20647.C11	-	20648.C11	-	20649.C11	-
Metallic anthracite	20647.C12	20677.C12	20648.C12	20678.C12	20649.C12	20679.C12
Matt silver	20647.C13	20677.C13	20648.C13	20678.C13	20649.C13	20679.C13
Matt titanium	20647.C14	20677.C14	20648.C14	20678.C14	20649.C14	20679.C14
Matt anthracite	20647.C15	20677.C15	20648.C15	20678.C15	20649.C15	20679.C15
Refined (Refined metal)						
Satin gold (with gold frame)	20647.G21	20677.G21	20648.G21	20678.G21	20649.G21	20679.G21
Satin nickel	20647.C22	20677.C22	20648.C22	20678.C22	20649.C22	20679.C22
Satin chrome	-	20677.C23	-	20678.C23	-	20679.C23
Polished gold (with gold frame)	20647.G24	20677.G24	20648.G24	20678.G24	20649.G24	20679.G24
INOX (Stainless steel)						
Brushed inox	20647.C91	20677.C91	20648.C91	20678.C91	20649.C91	20679.C91
Wood (Solid wood)						
African wengé	20647.C31	-	20648.C31	-	20649.C31	-
White oak	20647.C32	20677.C32	20648.C32	20678.C32	20649.C32	20679.C32
Italian walnut	20647.C35	20677.C35	20648.C35	20678.C35	20649.C35	20679.C35
American cherrywood	-	20677.C36	-	20678.C36	-	20679.C36
Glass (Crystal)						
Black ice	20647.C71	-	20648.C71	-	20649.C71	-
White ice	20647.C72	-	20648.C72	-	20649.C72	-
Silver mirror	20647.C81	-	20648.C81	-	20649.C81	-

Eikon Total Look cover plates for British standard: guideline

Bright (Varnished metal)						
Artic white	20647.B01	20677.B01	20648.B01	20678.B01	20649.B01	20679.B01
Matt silver	20647.N13	20677.N13	20648.N13	20678.N13	20649.N13	20679.N13
Matt anthracite	20647.15	20677.15	20648.15	20678.15	20649.15	20679.15

Primari

(Anodized aluminium)



01 Brilliant Aluminium



02 Next Grey



03 Lava Grey

Esclusivi

(Refined aluminium)



06 Black Sapphire



07 Silver



08 Titanium

Scolpiti

(Carved stone)



51 Carrara white



52 Natural split slate



53 Grey quartzite

Naturali

(Solid wood)



31 Italian walnut



32 White Oak



33 Wengé



04 Neutral Bronze



05 Dark Bronze



09 Polished gold



10 Satin gold

Luminosi (Bevelled crystal)



70 White diamond



71 Aqua



72 Silver ice

Raffinati (Natural leather)



21 Cream



22 Tobacco

Speciali (Corian®)



41 Glacier ice

Essenziali (Total aluminium and crystal)



17 Total white



18 Total black



87 Total white diamond



73 Pearl grey



74 Opal brown



75 Bronze mirror



76 Black diamond



88 Total black diamond

Classic

Bright

(Varnished metal)



C01 Arctic white



C02 Antique white



C07 Metallic champagne



C08 Metallic titanium



C10 Metallic silver



C11 Metallic Siena



C12 Metallic anthracite



C13 Matt silver



C14 Matt titanium



C15 Matt anthracite

Refined

(Refined metal)



G21 Satin gold



G22 Satin nickel



G24 Polished gold

Inox

(Stainless steel)



C91 Brushed inox

Wood

(Solid wood)



C31 African wengé



C32 White oak



C35 Italian walnut

Glass

(Crystal)



C71 Black ice



C72 White ice



C81 Silver mirror

Note: changes in the grain, colour or evenness of the surface of cover plates made of solid wood and crystal are a prized feature and a guarantee of the material's authenticity.

Bright

(Varnished metal)



C01 Arctic white



C02 Antique white



C07 Metallic champagne



C08 Metallic titanium



C09 Metallic Atlantic grey



C10 Metallic silver



C12 Metallic anthracite



C13 Matt silver



C14 Matt titanium



C15 Matt anthracite

Refined

(Refined metal)



G21 Satin gold



C22 Satin nickel



C23 Satin chrome



G24 Polished gold

Inox

(Stainless steel)



C91 Brushed inox

Wood

(Solid wood)



C32 White oak



C35 Italian walnut



C36 American cherrywood

Classic

Bright

(Varnished metal)



B01 Arctic white



N13 Matt silver



15 Matt anthracite

Round

Bright
(Varnished metal)



B01 Arctic white



N13 Matt silver



15 Matt anthracite

Devices and cover plates customization

Vimar laser technology allows the reproduction of any name, logotype or trademark, with absolute precision and indeleability, even for small quantities.

Information

- all devices, buttons and cover plates are customized depending on conditions described below;
- **Eikon Evo**
the following finishings of cover plates are not customizable: **Crystal**: silver ice (72), pearl grey (73), opal brown (74), **bronze mirror** (75); **Natural leather**: tobacco (22);
- **Eikon Chrome**
the following finishings of cover plates are not customizable: **Bright**: matt titanium (.C14); **Glass**: black ice (.C71), silver mirror (.C81);
- **Wooden cover plate** customization: prices and quantities agreed with the commercial networks.
- if the required customisation is listed in the table "**Standard symbols and wordings**", indicate the relative code in addition to the required item code, if it is not included in the table contact the Vimar sales office to check availability;
- the customisation is **visible in the dark**: on the bottom of rocker controls and buttons, with the standard symbols available from the catalogue; in the centre on axial controls and buttons, with the standard symbols available from the catalogue; on the bottom of interchangeable rocker buttons (20031..., 20032... e 20033...) with customisable spaces; in the centre of interchangeable axial buttons (20131.0... and 20132.0...) with customisable spaces;
- the interchangeable axial buttons (20131.0..., 20132.0...) can be customised by applying a Mylar label in the given space. For large quantities, customisations not included in the "**Standard symbols and wordings**" or for laser-printed customisations, please contact the Vimar sales department.

Laser customization advantages

- indeleble engraving that does not deteriorate over time;
- high-precision reproduction even of very fine lines and complex images;
- service available even for minimal quantities;
- possibility of ordering the same customization at different times with identical results.

The few limits of technology

- it is not possible to reproduce coloured images.

What to supply

- a printout of the image to be reproduced, in black-and-white line drawing scaled 2 or 3 times larger than the finished size;
- an image in EPS, TIFF or JPEG format of the subject to be reproduced.

Things to avoid

- do not provide photocopies;
- do not fax the image to be reproduced, because the low definition of the fax makes it impossible to reproduce the customization with the high quality of laser system.

How to proceed

- enclose (without paper clips, staples or adhesive tape) or send the image to be reproduced;
- deliver all the documentation to your area wholesaler/distributor, who will then forward it to Vimar.

Standard symbols and wordings (♦ symbols already on product catalogue)

◆ 64	◆ 65	◆ 66	67	68	69	70	71	72	73	74
ON 75	OFF 76	77	78	79	80	81	82	83	84	85
86	87	88	OPEN 289	CLOSE 290	ALARM 91	DO NOT DISTURB 92	COME IN 293	BACK 294	LIGHT 295	GENERAL 296
OUTSIDE 297	GARAGE 298	GARDEN 299	BATHROOM 2100	CELLAR 2101	STOREROOM 2102	STAIRS 2103	ATTIC 2104	TERRACE 2105	106	107
108	109	158	159	160	161	162	163			

Smart card customization

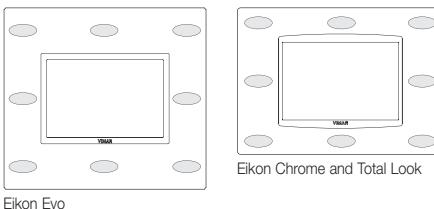
Black-and-white customization in the rear side of smart, ISO and transponder cards.

Cover plates, switches and buttons customization



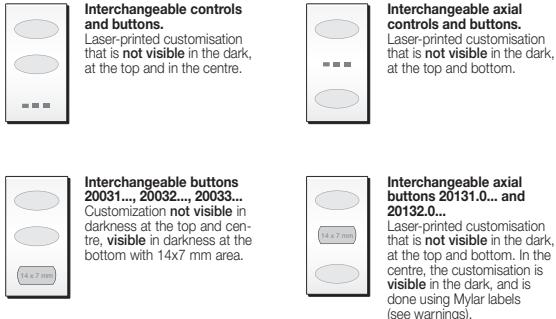
Customizable positions

Cover plates



Eikon Evo

Buttons and switches



Interchangeable axial controls and buttons.

Laser-printed customisation that is **not visible** in the dark, at the top and in the centre.

Interchangeable axial buttons 20131.0... and 20132.0...

Laser-printed customisation that is **not visible** in the dark, at the top and bottom. In the centre, the customisation is **visible** in the dark, and is done using Mylar labels (see warnings).



Isoset

Modules

IP40

IP55

IP55 cover

1



14801



14901

2



14802*



14902

3



14803



14903

4



14804



14812*



14904

6



14813*



14827



14912

8



14814*



14832



14837



14913

10



14815*



14914

12



14838



14833



14915

14



14817*



14916

16



14839



14917

*) Horizontal or vertical installation, by mounting the equipment rotated at a 90° angle

**) For white version, add to the basic code: .01
For granite version, add to the basic code: .14

80007352532625

B.C15025 EN 1503



 **VIMAR**
Viale Vicenza, 14
36063 Marostica VI - Italy
Tel. +39 0424 488 600
Fax +39 0424 488 709
www.vimar.com